


STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER GMBU F-3-9-17				
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE				
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)				
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825				
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052						9. OPERATOR E-MAIL mcrozier@newfield.com				
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-75038			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>				
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')				
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')				
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
20. LOCATION OF WELL	FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN			
LOCATION AT SURFACE	2076 FNL 618 FEL		SENE	4	9.0 S	17.0 E	S			
Top of Uppermost Producing Zone	1579 FNL 186 FEL		SENE	4	9.0 S	17.0 E	S			
At Total Depth	1078 FNL 277 FWL		NWNW	3	9.0 S	17.0 E	S			
21. COUNTY DUCESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 277			23. NUMBER OF ACRES IN DRILLING UNIT 20				
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1266			26. PROPOSED DEPTH MD: 6417 TVD: 6250				
27. ELEVATION - GROUND LEVEL 5119			28. BOND NUMBER WYB000493			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478				
Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
Prod	7.875	5.5	0 - 6417	15.5	J-55 LT&C	8.3	Premium Lite High Strength	305	3.26	11.0
							50/50 Poz	363	1.24	14.3
ATTACHMENTS										
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
NAME Mandie Crozier				TITLE Regulatory Tech				PHONE 435 646-4825		
SIGNATURE				DATE 11/01/2011				EMAIL mcrozier@newfield.com		
API NUMBER ASSIGNED 43013510360000				APPROVAL  Permit Manager						

RECEIVED: November 21, 2011

NEWFIELD PRODUCTION COMPANY
GMBU F-3-9-17
AT SURFACE: SE/NE SECTION 4, T9S R17E
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1430'
Green River	1430'
Wasatch	6080'
Proposed TD	6417'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1430' – 6080'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. Casing Design: GMBU F-3-9-17

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,417'	15.5	J-55	LTC	4,810 2.36	4,040 1.98	217,000 2.18

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: GMBU F-3-9-17

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138 161	30%	15.8	1.17
Prod casing Lead	4,417'	Prem Lite II w/ 10% gel + 3% KCl	305 995	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 300 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 300 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**


It is anticipated that the drilling operations will commence the second quarter of 2012, and take approximately seven (7) days from spud to rig release.

T9S, R17E, S.L.B.&M.

N89°58'E (G.L.O.)

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, F-3-9-17, LOCATED AS SHOWN IN THE SE 1/4 NE 1/4 OF SECTION 4, T9S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

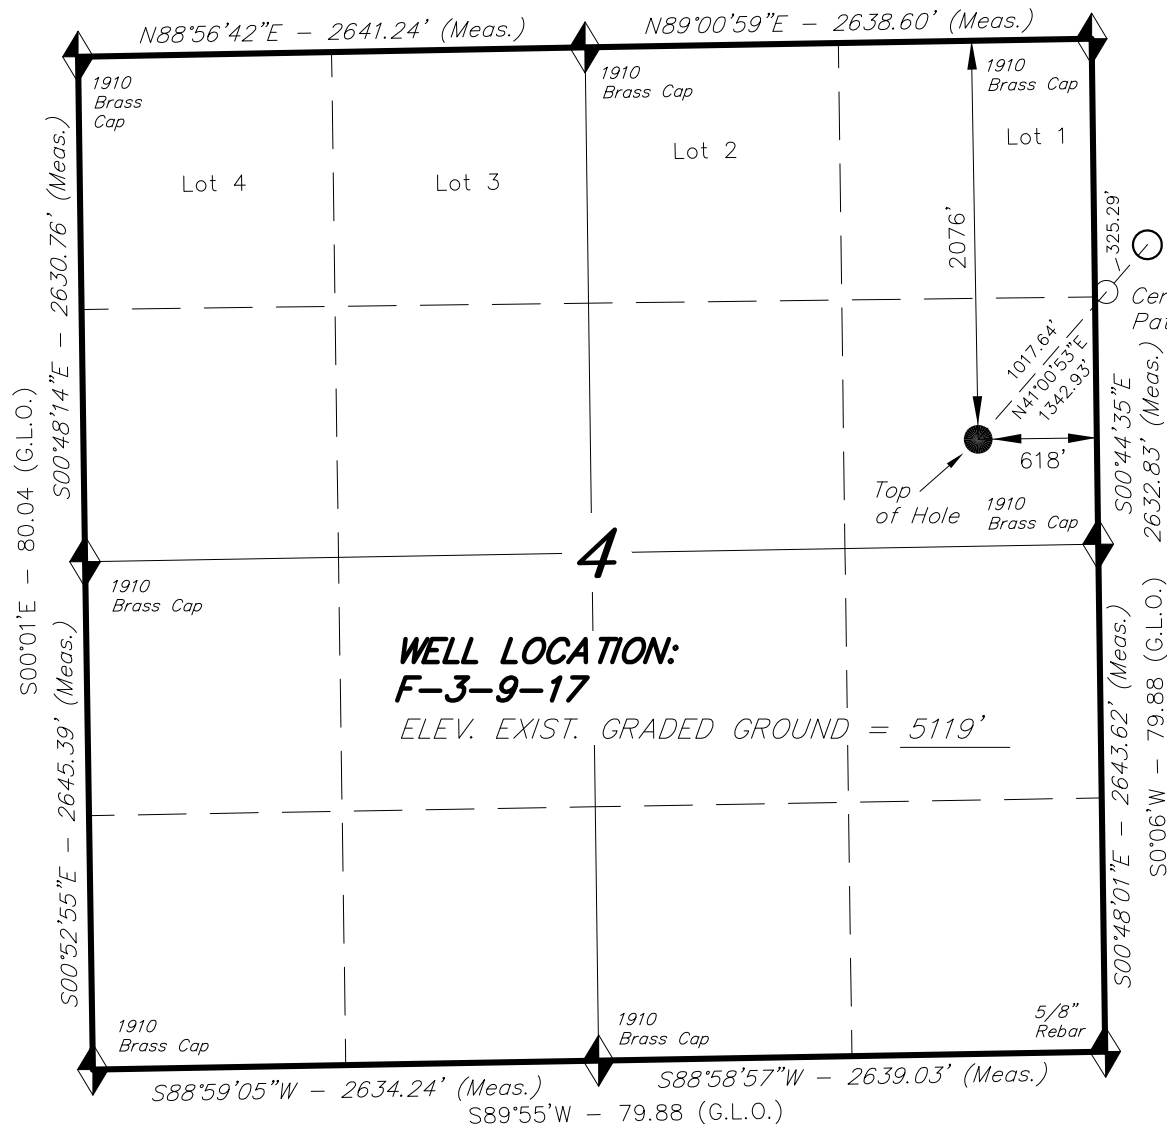


NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.

**WELL LOCATION:
F-3-9-17**

ELEV. EXIST. GRADED GROUND = 5119'

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

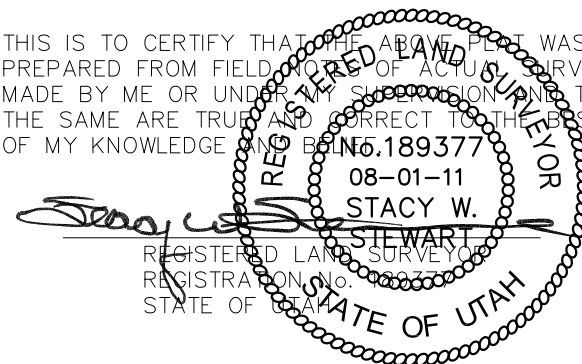

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

F-3-9-17
(Surface Location) NAD 83
LATITUDE = 40° 03' 41.35"
LONGITUDE = 110° 00' 15.68"


TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501


DATE SURVEYED: 06-29-11	SURVEYED BY: C.S.	VERSION:
DATE DRAWN: 08-01-11	DRAWN BY: M.W.	V1
REVISED:	SCALE: 1" = 1000'	

RECEIVED: November 01, 2011

NEWFIELD EXPLORATION COMPANY

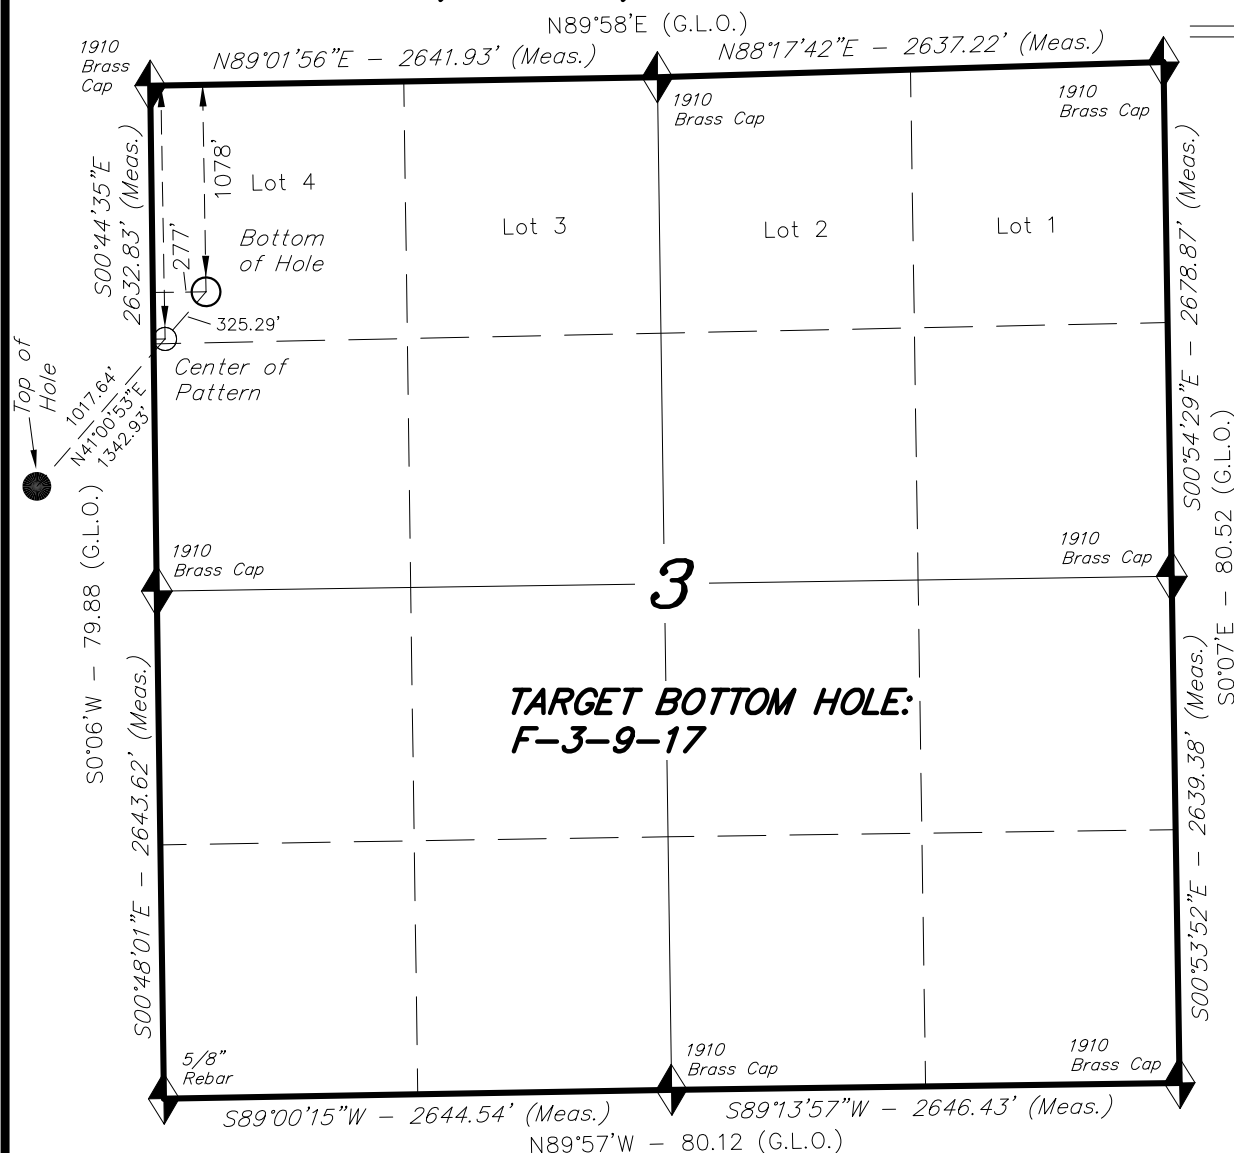

TARGET BOTTOM HOLE, F-3-9-17,
LOCATED AS SHOWN IN THE NW 1/4 NW
1/4 (LOT 4) OF SECTION 3, T9S, R17E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

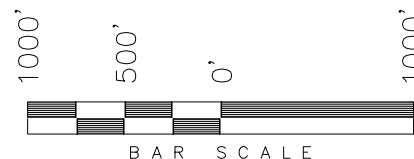

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Center of Pattern footages are 1320' FNL & 60' FWL.

THIS IS TO CERTIFY THAT THE ABOVE PLOT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST
OF MY KNOWLEDGE AND BELIEF.

08-01-11

STACY W

STEWART

REGISTERED LAND SURVEYOR

REGISTRATION No. 180377

STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078


(435) 781-2501

DATE SURVEYED: 06-29-11	SURVEYED BY: C.S.	VERSION:
DATE DRAWN: 08-01-11	DRAWN BY: M.W.	V1
REVISED:	SCALE: 1" = 1000'	

BASIS OF ELEV; Elevations are based on
an N.G.S. OPUS Correction. LOCATION:
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

RECEIVED: November 01, 2011

Access Road Map

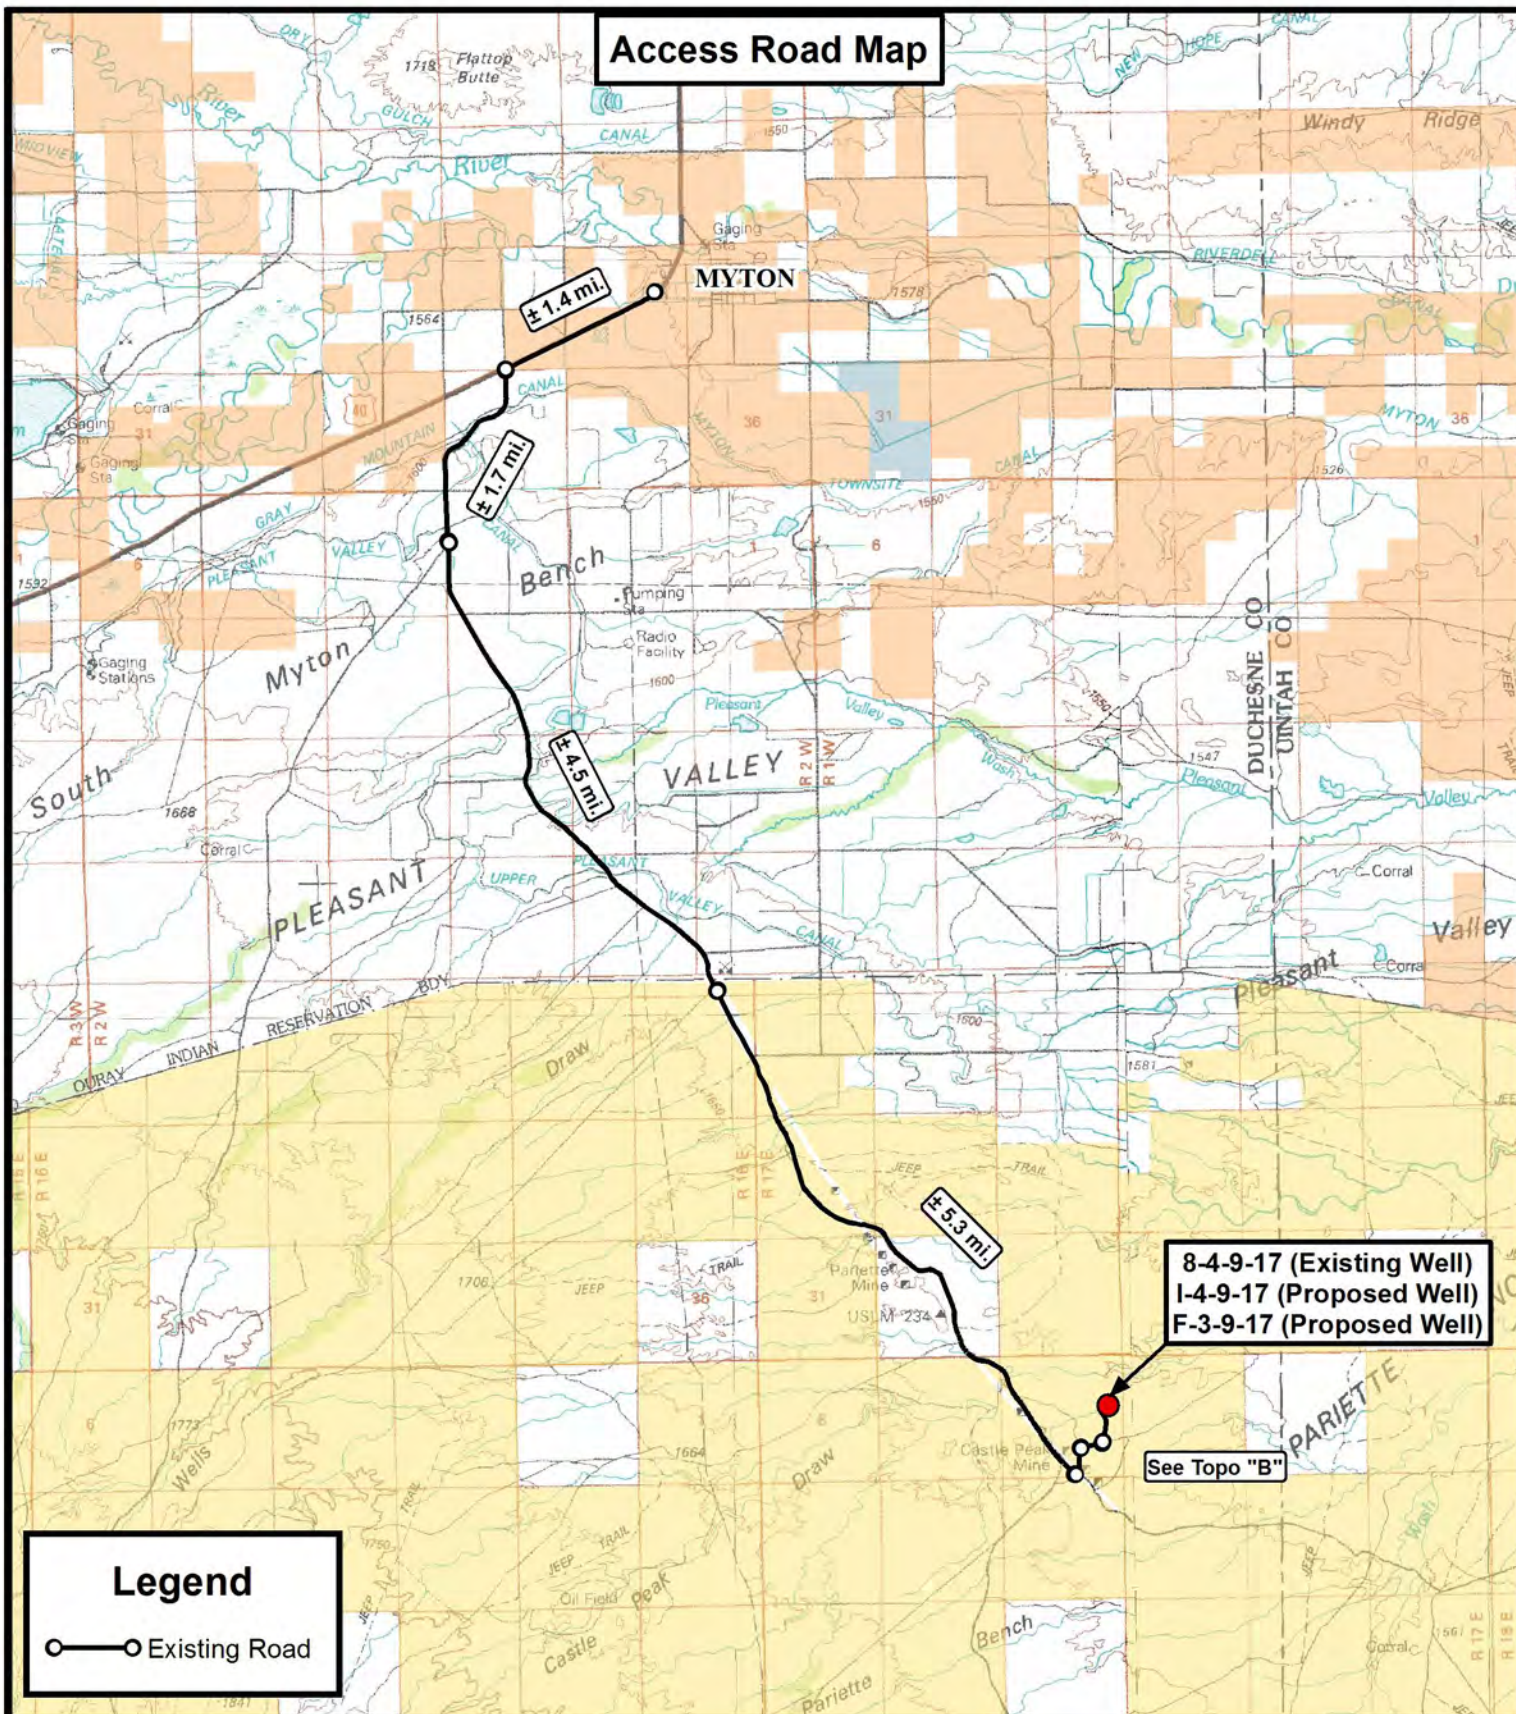

Legend

Existing Road



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

8-4-9-17 (Existing Well)
1-4-9-17 (Proposed Well)
F-3-9-17 (Proposed Well)
SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.


DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET

A

Access Road Map

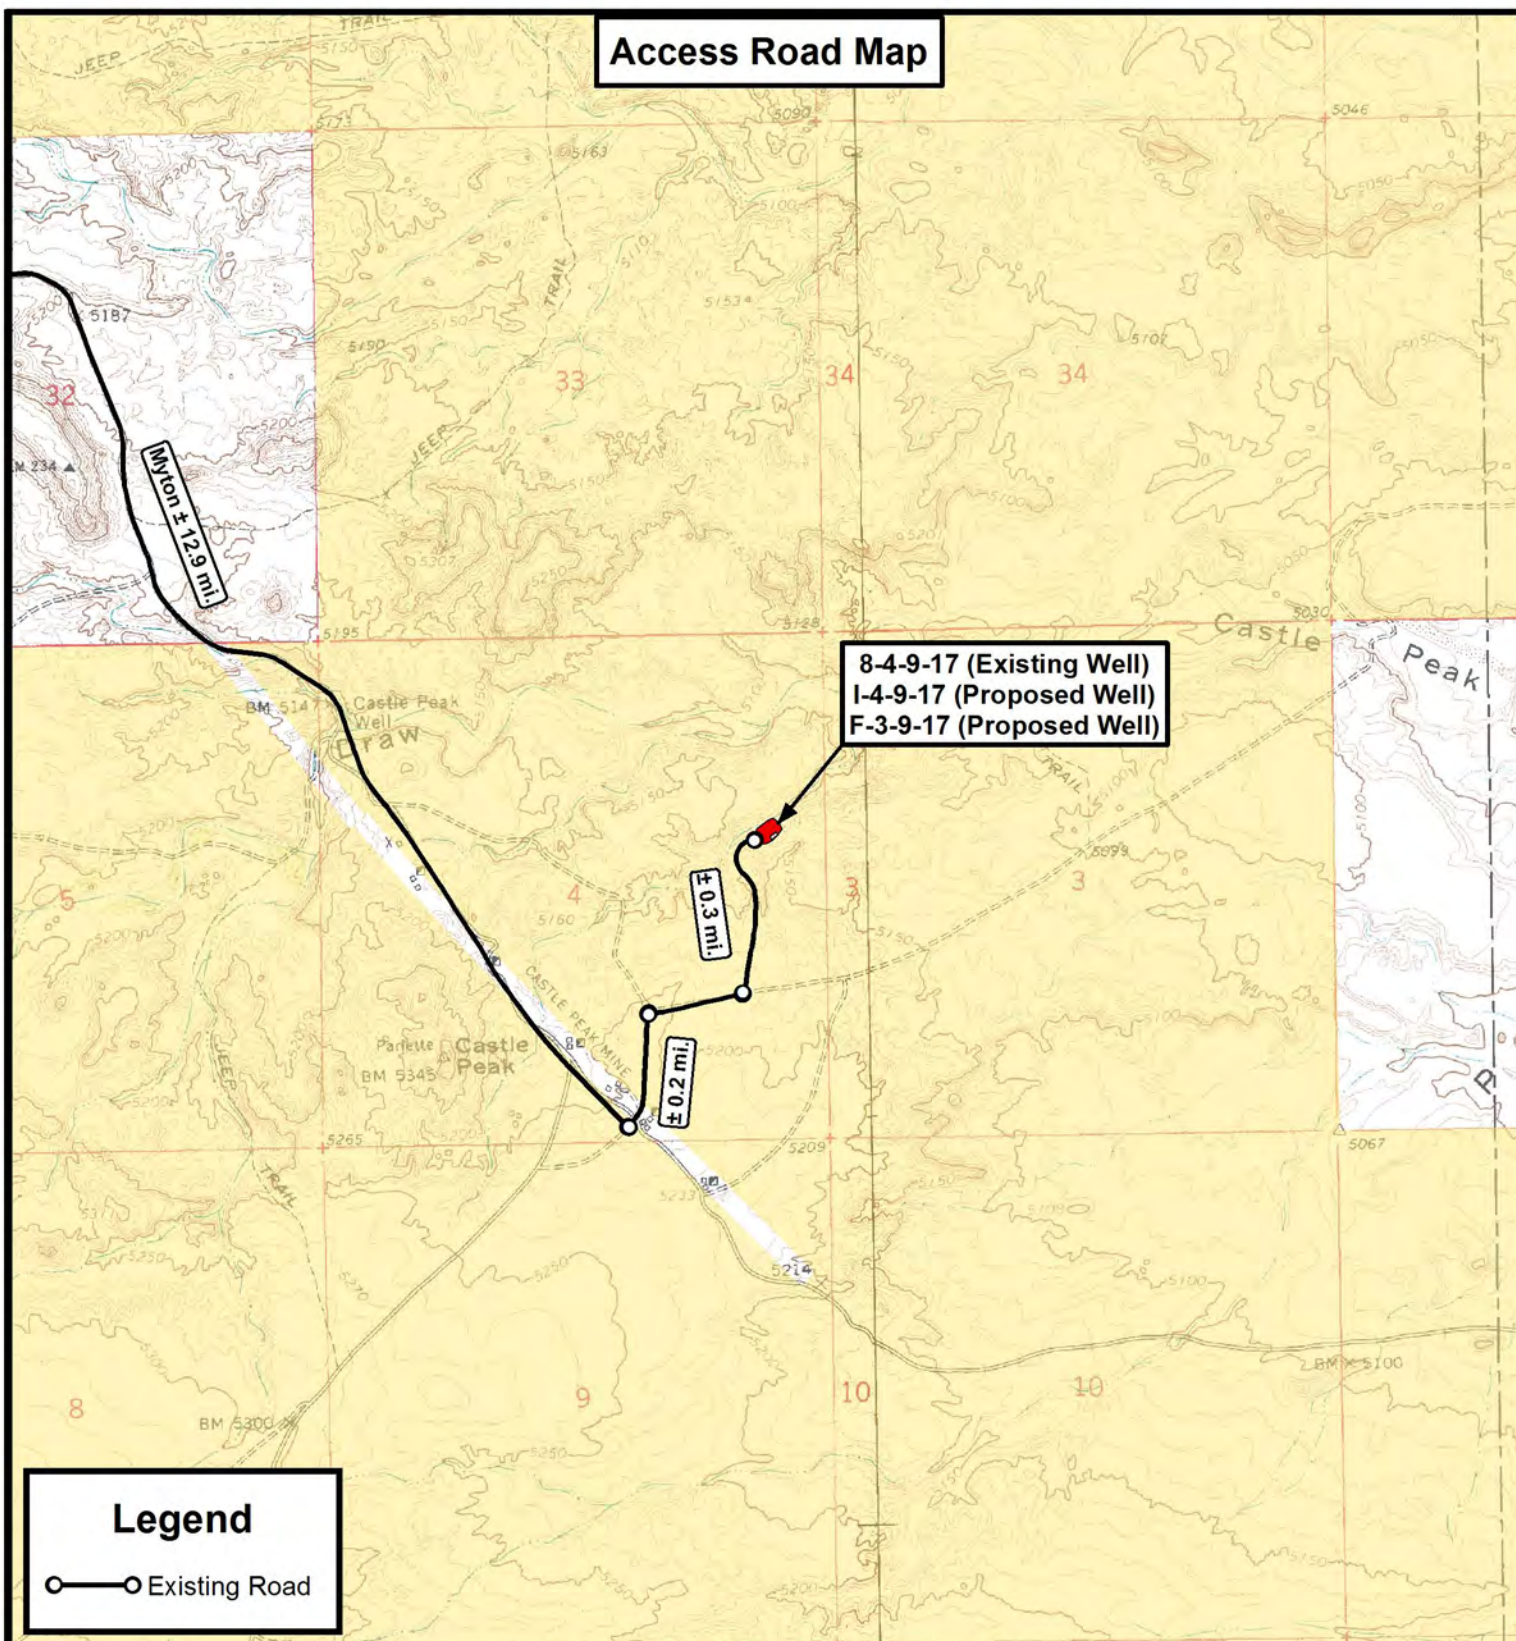

Legend

Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

8-4-9-17 (Existing Well)
I-4-9-17 (Proposed Well)
F-3-9-17 (Proposed Well)
SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.


DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET

B

Proposed Pipeline Map

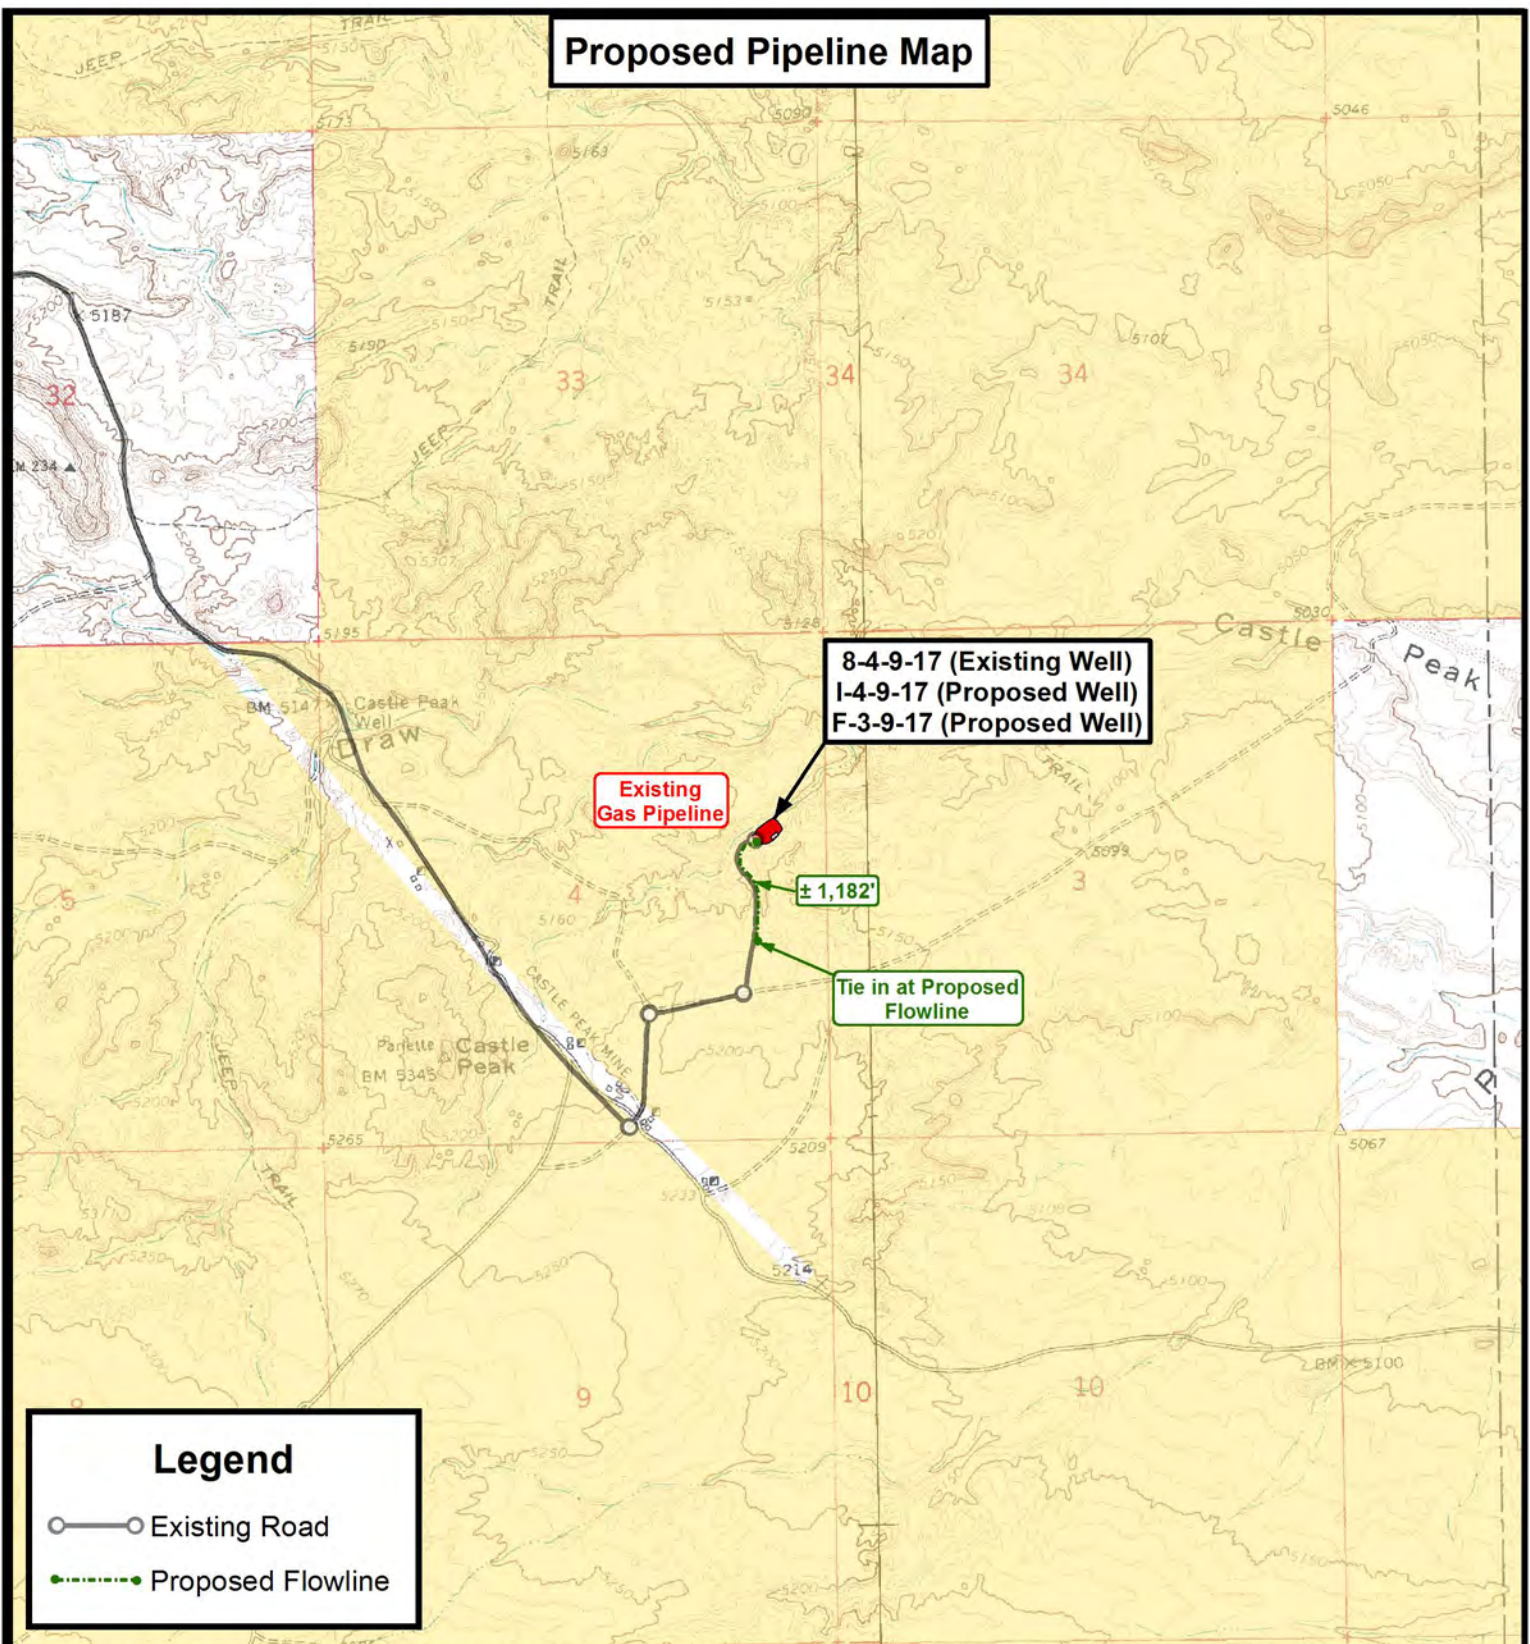

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

8-4-9-17 (Existing Well)
 I-4-9-17 (Proposed Well)
 F-3-9-17 (Proposed Well)
 SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1" = 2,000'		


TOPOGRAPHIC MAP

SHEET

C

Exhibit "B" Map

8-4-9-17 (Existing Well)
 I-4-9-17 (Proposed Well)
 F-3-9-17 (Proposed Well)

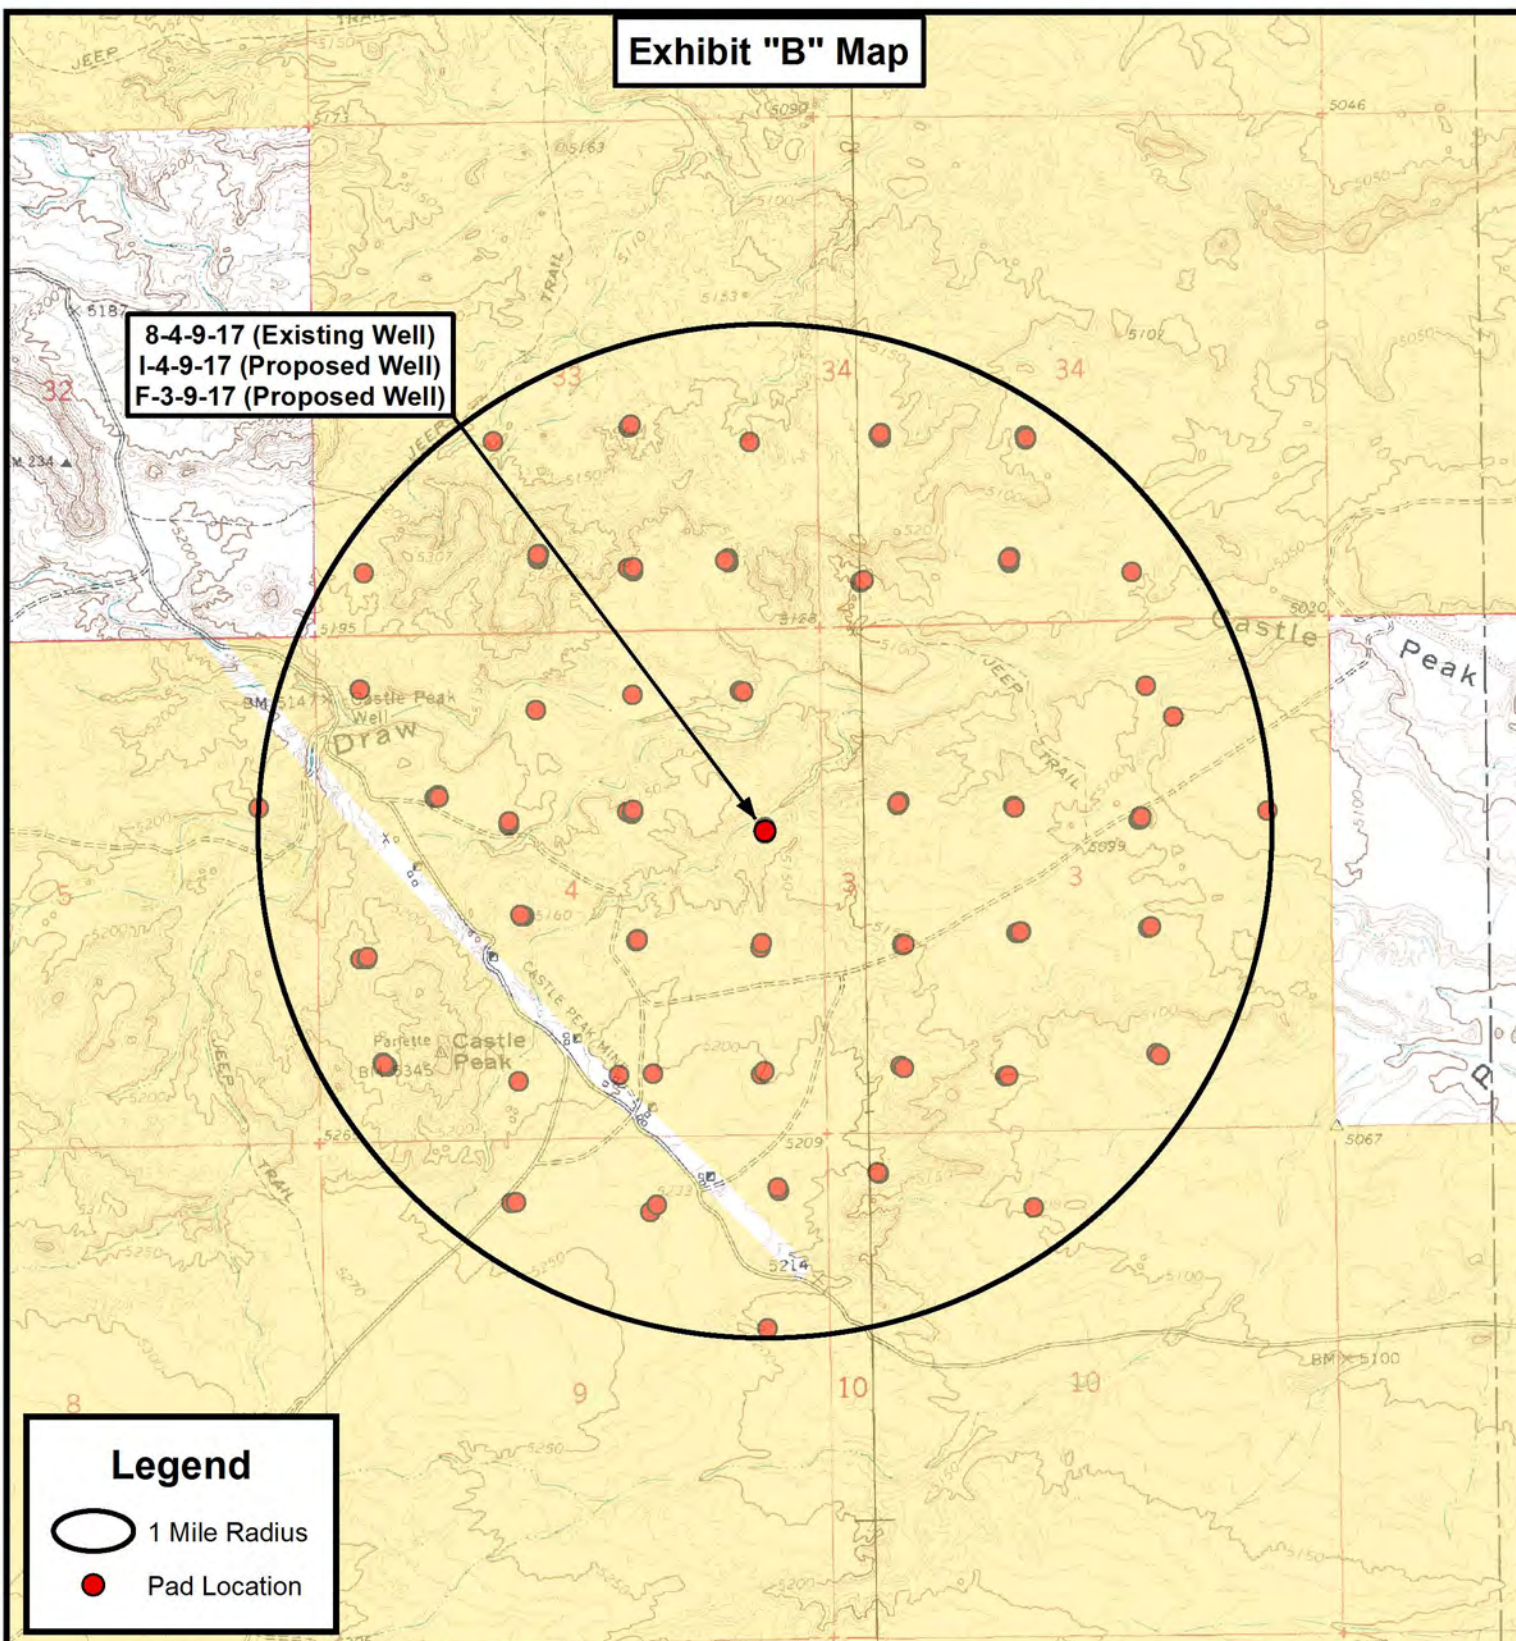**Legend**

- 1 Mile Radius
 ● Pad Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

8-4-9-17 (Existing Well)
 I-4-9-17 (Proposed Well)
 F-3-9-17 (Proposed Well)
 SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET

D



NEWFIELD EXPLORATION

USGS Myton SW (UT)

SECTION 4 T9S R17E

F-3-9-17

Wellbore #1

Plan: Design #1

Standard Planning Report

28 July, 2011





Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well F-3-9-17
Company:	NEWFIELD EXPLORATION	TVD Reference:	F-3-9-17 @ 5131.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	F-3-9-17 @ 5131.0ft (Newfield Rig)
Site:	SECTION 4 T9S R17E	North Reference:	True
Well:	F-3-9-17	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 4 T9S R17E			
Site Position:		Northing:	7,194,100.00 ft	Latitude: 40° 3' 36.542 N
From:	Lat/Long	Easting:	2,057,000.00 ft	Longitude: 110° 0' 41.593 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence: 0.95 °

Well	F-3-9-17, SHL LAT: 40 03 41.35 LONG: -110 00 15.68			
Well Position	+N/-S	486.4 ft	Northing:	7,194,620.00 ft
	+E/-W	2,014.7 ft	Easting:	2,059,006.24 ft
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,131.0 ft
			Ground Level:	5,119.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	2011/07/28	11.28	65.82	52,279

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	5,000.0	0.0	0.0	41.01

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,572.3	14.58	41.01	1,561.8	92.9	80.8	1.50	1.50	0.00	41.01	
5,124.9	14.58	41.01	5,000.0	767.9	667.8	0.00	0.00	0.00	0.00	F-3-9-17 TGT
6,416.6	14.58	41.01	6,250.0	1,013.3	881.3	0.00	0.00	0.00	0.00	



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well F-3-9-17
Company:	NEWFIELD EXPLORATION	TVD Reference:	F-3-9-17 @ 5131.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	F-3-9-17 @ 5131.0ft (Newfield Rig)
Site:	SECTION 4 T9S R17E	North Reference:	True
Well:	F-3-9-17	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	41.01	700.0	1.0	0.9	1.3	1.50	1.50	0.00
800.0	3.00	41.01	799.9	3.9	3.4	5.2	1.50	1.50	0.00
900.0	4.50	41.01	899.7	8.9	7.7	11.8	1.50	1.50	0.00
1,000.0	6.00	41.01	999.3	15.8	13.7	20.9	1.50	1.50	0.00
1,100.0	7.50	41.01	1,098.6	24.7	21.4	32.7	1.50	1.50	0.00
1,200.0	9.00	41.01	1,197.5	35.5	30.9	47.0	1.50	1.50	0.00
1,300.0	10.50	41.01	1,296.1	48.3	42.0	64.0	1.50	1.50	0.00
1,400.0	12.00	41.01	1,394.2	63.0	54.8	83.5	1.50	1.50	0.00
1,500.0	13.50	41.01	1,491.7	79.6	69.3	105.5	1.50	1.50	0.00
1,572.3	14.58	41.01	1,561.8	92.9	80.8	123.1	1.50	1.50	0.00
1,600.0	14.58	41.01	1,588.6	98.1	85.3	130.1	0.00	0.00	0.00
1,700.0	14.58	41.01	1,685.4	117.1	101.9	155.2	0.00	0.00	0.00
1,800.0	14.58	41.01	1,782.2	136.1	118.4	180.4	0.00	0.00	0.00
1,900.0	14.58	41.01	1,879.0	155.1	134.9	205.6	0.00	0.00	0.00
2,000.0	14.58	41.01	1,975.8	174.1	151.4	230.8	0.00	0.00	0.00
2,100.0	14.58	41.01	2,072.5	193.1	168.0	256.0	0.00	0.00	0.00
2,200.0	14.58	41.01	2,169.3	212.1	184.5	281.1	0.00	0.00	0.00
2,300.0	14.58	41.01	2,266.1	231.1	201.0	306.3	0.00	0.00	0.00
2,400.0	14.58	41.01	2,362.9	250.1	217.5	331.5	0.00	0.00	0.00
2,500.0	14.58	41.01	2,459.6	269.1	234.1	356.7	0.00	0.00	0.00
2,600.0	14.58	41.01	2,556.4	288.1	250.6	381.9	0.00	0.00	0.00
2,700.0	14.58	41.01	2,653.2	307.1	267.1	407.0	0.00	0.00	0.00
2,800.0	14.58	41.01	2,750.0	326.1	283.6	432.2	0.00	0.00	0.00
2,900.0	14.58	41.01	2,846.8	345.1	300.2	457.4	0.00	0.00	0.00
3,000.0	14.58	41.01	2,943.5	364.1	316.7	482.6	0.00	0.00	0.00
3,100.0	14.58	41.01	3,040.3	383.1	333.2	507.8	0.00	0.00	0.00
3,200.0	14.58	41.01	3,137.1	402.1	349.7	532.9	0.00	0.00	0.00
3,300.0	14.58	41.01	3,233.9	421.1	366.3	558.1	0.00	0.00	0.00
3,400.0	14.58	41.01	3,330.6	440.1	382.8	583.3	0.00	0.00	0.00
3,500.0	14.58	41.01	3,427.4	459.1	399.3	608.5	0.00	0.00	0.00
3,600.0	14.58	41.01	3,524.2	478.1	415.8	633.7	0.00	0.00	0.00
3,700.0	14.58	41.01	3,621.0	497.1	432.4	658.8	0.00	0.00	0.00
3,800.0	14.58	41.01	3,717.8	516.1	448.9	684.0	0.00	0.00	0.00
3,900.0	14.58	41.01	3,814.5	535.1	465.4	709.2	0.00	0.00	0.00
4,000.0	14.58	41.01	3,911.3	554.1	481.9	734.4	0.00	0.00	0.00
4,100.0	14.58	41.01	4,008.1	573.1	498.5	759.6	0.00	0.00	0.00
4,200.0	14.58	41.01	4,104.9	592.1	515.0	784.7	0.00	0.00	0.00
4,300.0	14.58	41.01	4,201.6	611.1	531.5	809.9	0.00	0.00	0.00
4,400.0	14.58	41.01	4,298.4	630.1	548.0	835.1	0.00	0.00	0.00
4,500.0	14.58	41.01	4,395.2	649.1	564.6	860.3	0.00	0.00	0.00
4,600.0	14.58	41.01	4,492.0	668.1	581.1	885.5	0.00	0.00	0.00
4,700.0	14.58	41.01	4,588.8	687.1	597.6	910.6	0.00	0.00	0.00
4,800.0	14.58	41.01	4,685.5	706.1	614.1	935.8	0.00	0.00	0.00
4,900.0	14.58	41.01	4,782.3	725.1	630.7	961.0	0.00	0.00	0.00
5,000.0	14.58	41.01	4,879.1	744.1	647.2	986.2	0.00	0.00	0.00
5,100.0	14.58	41.01	4,975.9	763.1	663.7	1,011.4	0.00	0.00	0.00
5,124.9	14.58	41.01	5,000.0	767.9	667.8	1,017.6	0.00	0.00	0.00




Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well F-3-9-17
Company:	NEWFIELD EXPLORATION	TVD Reference:	F-3-9-17 @ 5131.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	F-3-9-17 @ 5131.0ft (Newfield Rig)
Site:	SECTION 4 T9S R17E	North Reference:	True
Well:	F-3-9-17	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,200.0	14.58	41.01	5,072.6	782.1	680.2	1,036.5	0.00	0.00	0.00
5,300.0	14.58	41.01	5,169.4	801.1	696.8	1,061.7	0.00	0.00	0.00
5,400.0	14.58	41.01	5,266.2	820.1	713.3	1,086.9	0.00	0.00	0.00
5,500.0	14.58	41.01	5,363.0	839.1	729.8	1,112.1	0.00	0.00	0.00
5,600.0	14.58	41.01	5,459.8	858.1	746.3	1,137.3	0.00	0.00	0.00
5,700.0	14.58	41.01	5,556.5	877.1	762.9	1,162.4	0.00	0.00	0.00
5,800.0	14.58	41.01	5,653.3	896.1	779.4	1,187.6	0.00	0.00	0.00
5,900.0	14.58	41.01	5,750.1	915.1	795.9	1,212.8	0.00	0.00	0.00
6,000.0	14.58	41.01	5,846.9	934.1	812.4	1,238.0	0.00	0.00	0.00
6,100.0	14.58	41.01	5,943.6	953.1	829.0	1,263.2	0.00	0.00	0.00
6,200.0	14.58	41.01	6,040.4	972.1	845.5	1,288.3	0.00	0.00	0.00
6,300.0	14.58	41.01	6,137.2	991.1	862.0	1,313.5	0.00	0.00	0.00
6,400.0	14.58	41.01	6,234.0	1,010.1	878.5	1,338.7	0.00	0.00	0.00
6,416.6	14.58	41.01	6,250.0	1,013.3	881.3	1,342.9	0.00	0.00	0.00





Project: USGS Myton SW (UT)
 Site: SECTION 4 T9S R17E
 Well: F-3-9-17
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.28°

Magnetic Field
 Strength: 52279.1snT
 Dip Angle: 65.82°
 Date: 2011/07/28
 Model: IGRF2010

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100
 TARGET RADIUS IS 75'

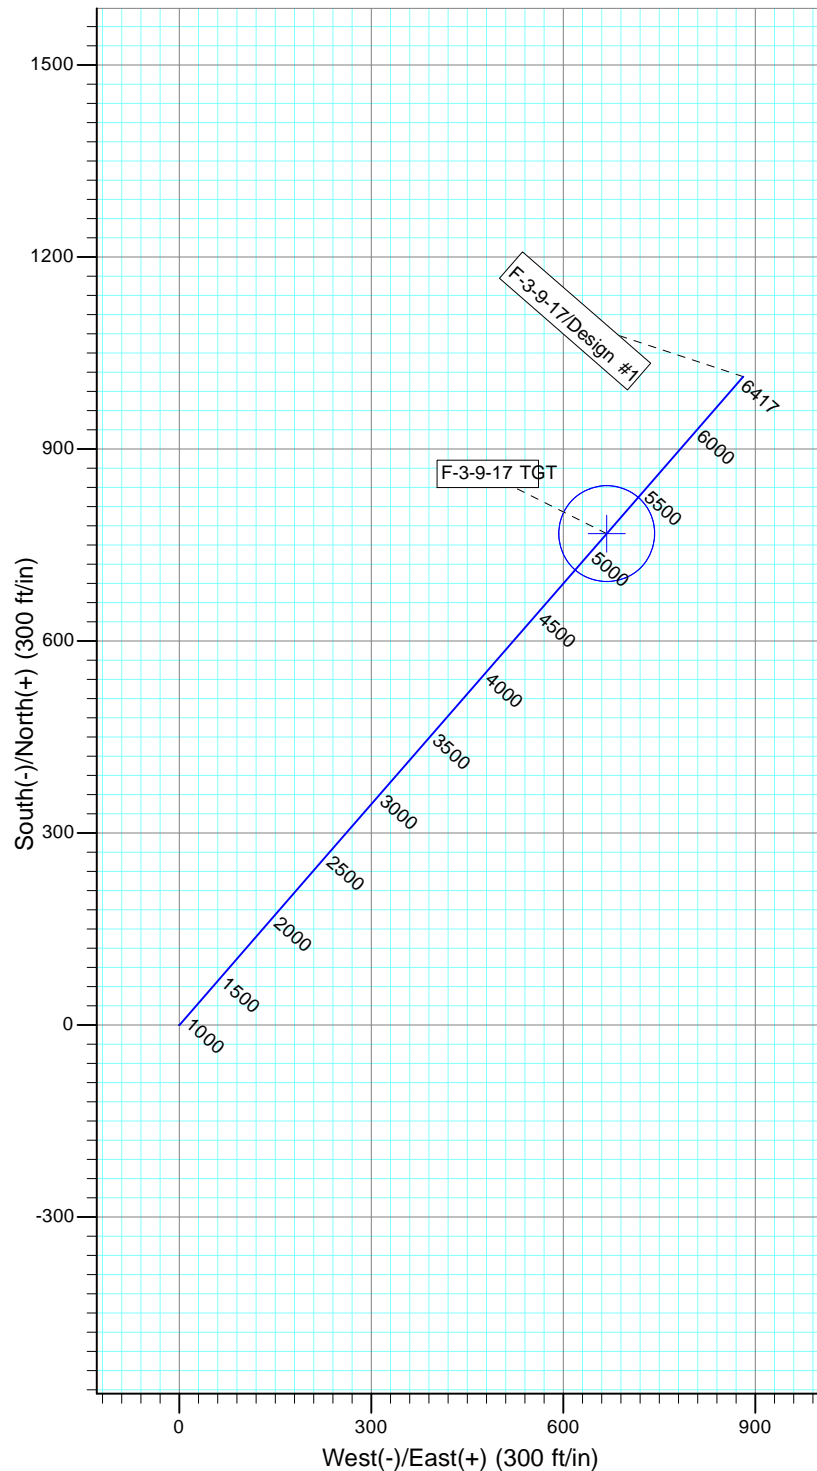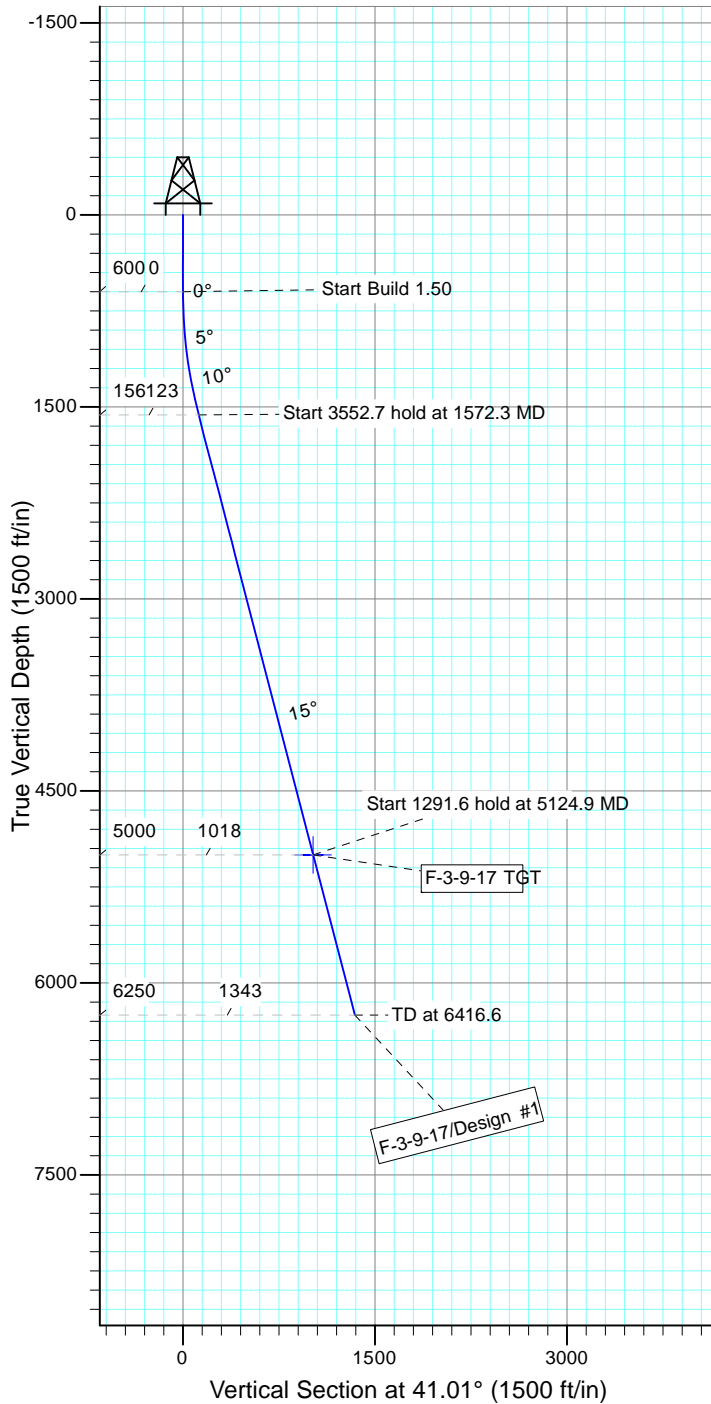

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
F-3-9-17 TGT	5000.0	767.9	667.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1572.3	14.58	41.01	1561.8	92.9	80.8	1.50	41.01	123.1	
4	5124.9	14.58	41.01	5000.0	767.9	667.8	0.00	0.00	1017.6	F-3-9-17 TGT
5	6416.6	14.58	41.01	6250.0	1013.3	881.3	0.00	0.00	1342.9	



**NEWFIELD PRODUCTION COMPANY
GMBU F-3-9-17
AT SURFACE: SE/NE SECTION 4, T9S R17E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU F-3-9-17 located in the SE 1/4 NE 1/4 Section 4, T9S, R17E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction – 11.5 miles \pm to it's junction with an existing road to the north; proceed in a northerly direction – 0.2 miles \pm to it's junction with an existing road to the east; proceed in a northeasterly direction – 0.3 \pm to it's junction with an existing road to the north; proceed in a northerly direction – 0.3 \pm to the existing 8-4-9-17 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 8-4-9-17 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-10136

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. State of Utah Antiquities Project Permit # U-11-MQ-0698b,p 8/29/11, prepared by

Montgomery Archaeological Consultants. Paleontological Resource Survey prepared by, SWCA Environmental Consultants, 8/24/11. See attached report cover pages, Exhibit "D".

Surface Flow Line

Newfield requests 1,182' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "C"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

Installation: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

Termination and Final Reclamation: After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Details of the On-Site Inspection

The proposed GMBU F-3-9-17 was on-sited on 9/8/11. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), and Aaron Roe (Bureau of Land Management).

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU F-3-9-17, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU F-3-9-17, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton

Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052

Telephone: (435) 646-3721

Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #F-3-9-17, Section 4, Township 9S, Range 17E: Lease UTU-75038 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

10/31/11
Date

Mandie Crozier
Regulatory Analyst
Newfield Production Company

Typical 2M BOP stack configuration

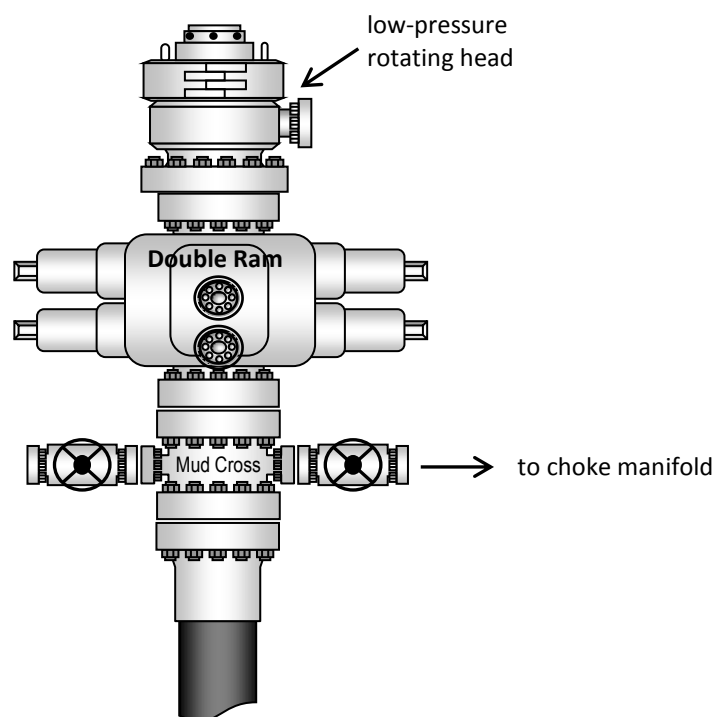

NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

8-4-9-17 (Existing Well)

I-4-9-17 (Proposed Well)

F-3-9-17 (Proposed Well)


Pad Location: SENE Section 4, T9S, R17E, S.L.B.&M.



TOP HOLE FOOTAGES

I-4-9-17 (PROPOSED)
2097' FNL & 619' FEL

F-3-9-17 (PROPOSED)
2076' FNL & 618' FEL

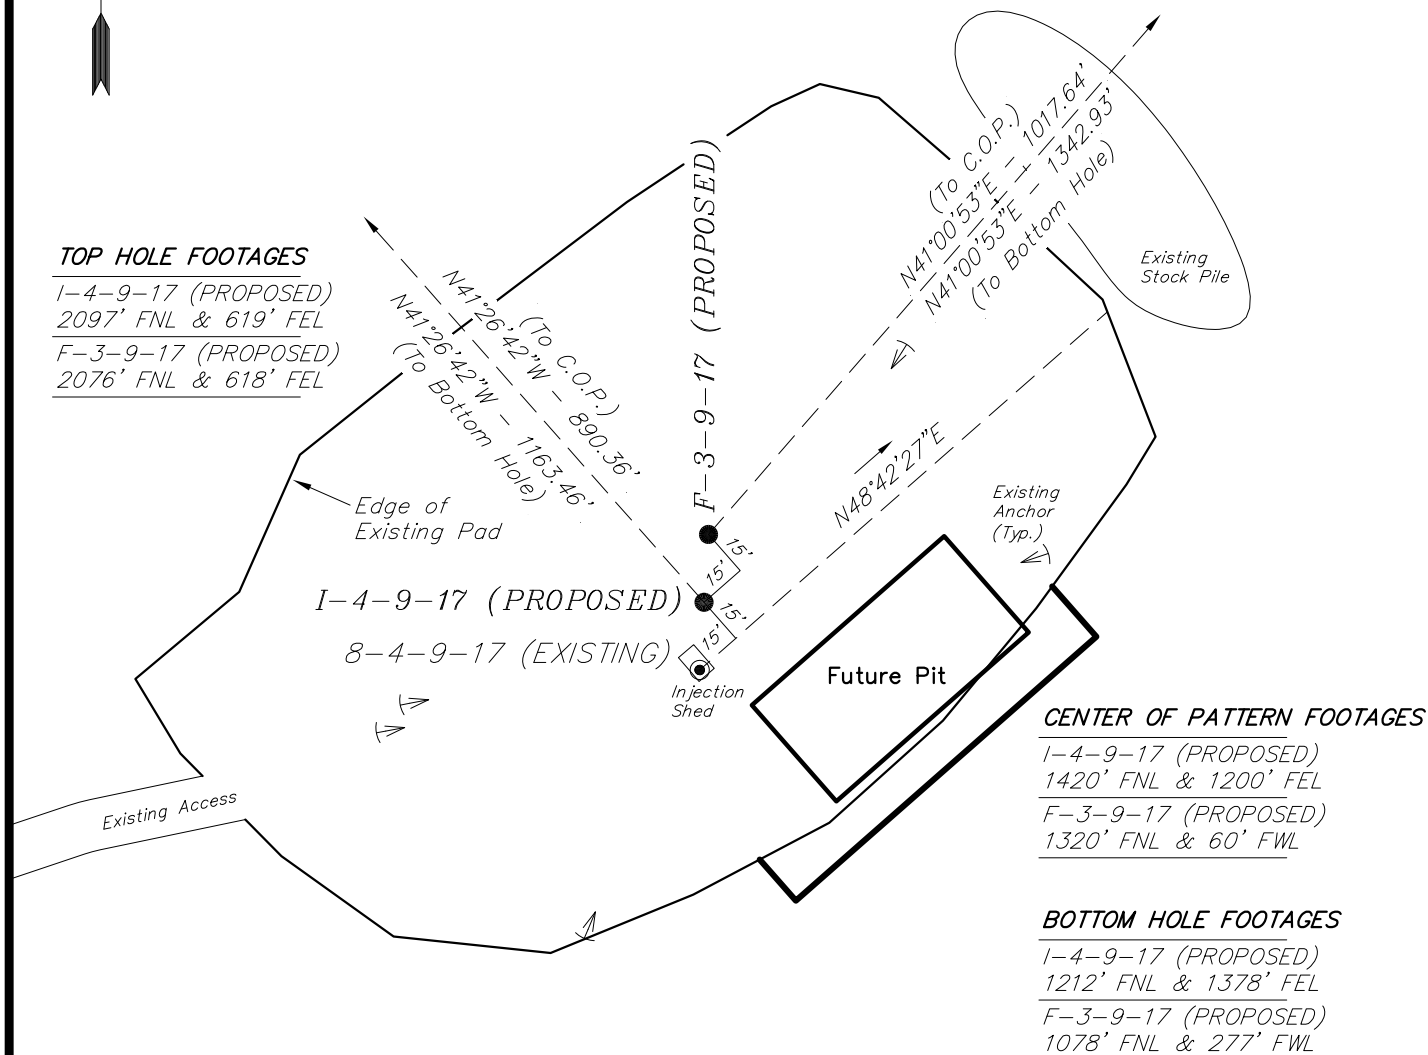

CENTER OF PATTERN FOOTAGES

I-4-9-17 (PROPOSED)
1420' FNL & 1200' FEL

F-3-9-17 (PROPOSED)
1320' FNL & 60' FWL

BOTTOM HOLE FOOTAGES

I-4-9-17 (PROPOSED)
1212' FNL & 1378' FEL

F-3-9-17 (PROPOSED)
1078' FNL & 277' FWL

RELATIVE COORDINATES From Top Hole to C.O.P.

WELL	NORTH	EAST
I-4-9-17	667'	-589'
F-3-9-17	768'	668'

RELATIVE COORDINATES From Top Hole to Bottom Hole

WELL	NORTH	EAST
I-4-9-17	872'	-770'
F-3-9-17	1,013'	881'


LATITUDE & LONGITUDE Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
8-4-9-17	40° 03' 40.94"	110° 00' 15.73"
I-4-9-17	40° 03' 41.14"	110° 00' 15.71"
F-3-9-17	40° 03' 41.35"	110° 00' 15.68"

SURVEYED BY: C.S. DATE SURVEYED: 06-29-11 VERSION: V1
 DRAWN BY: M.W. DATE DRAWN: 08-01-11
 SCALE: 1" = 60' REVISED:

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: November 01, 2011

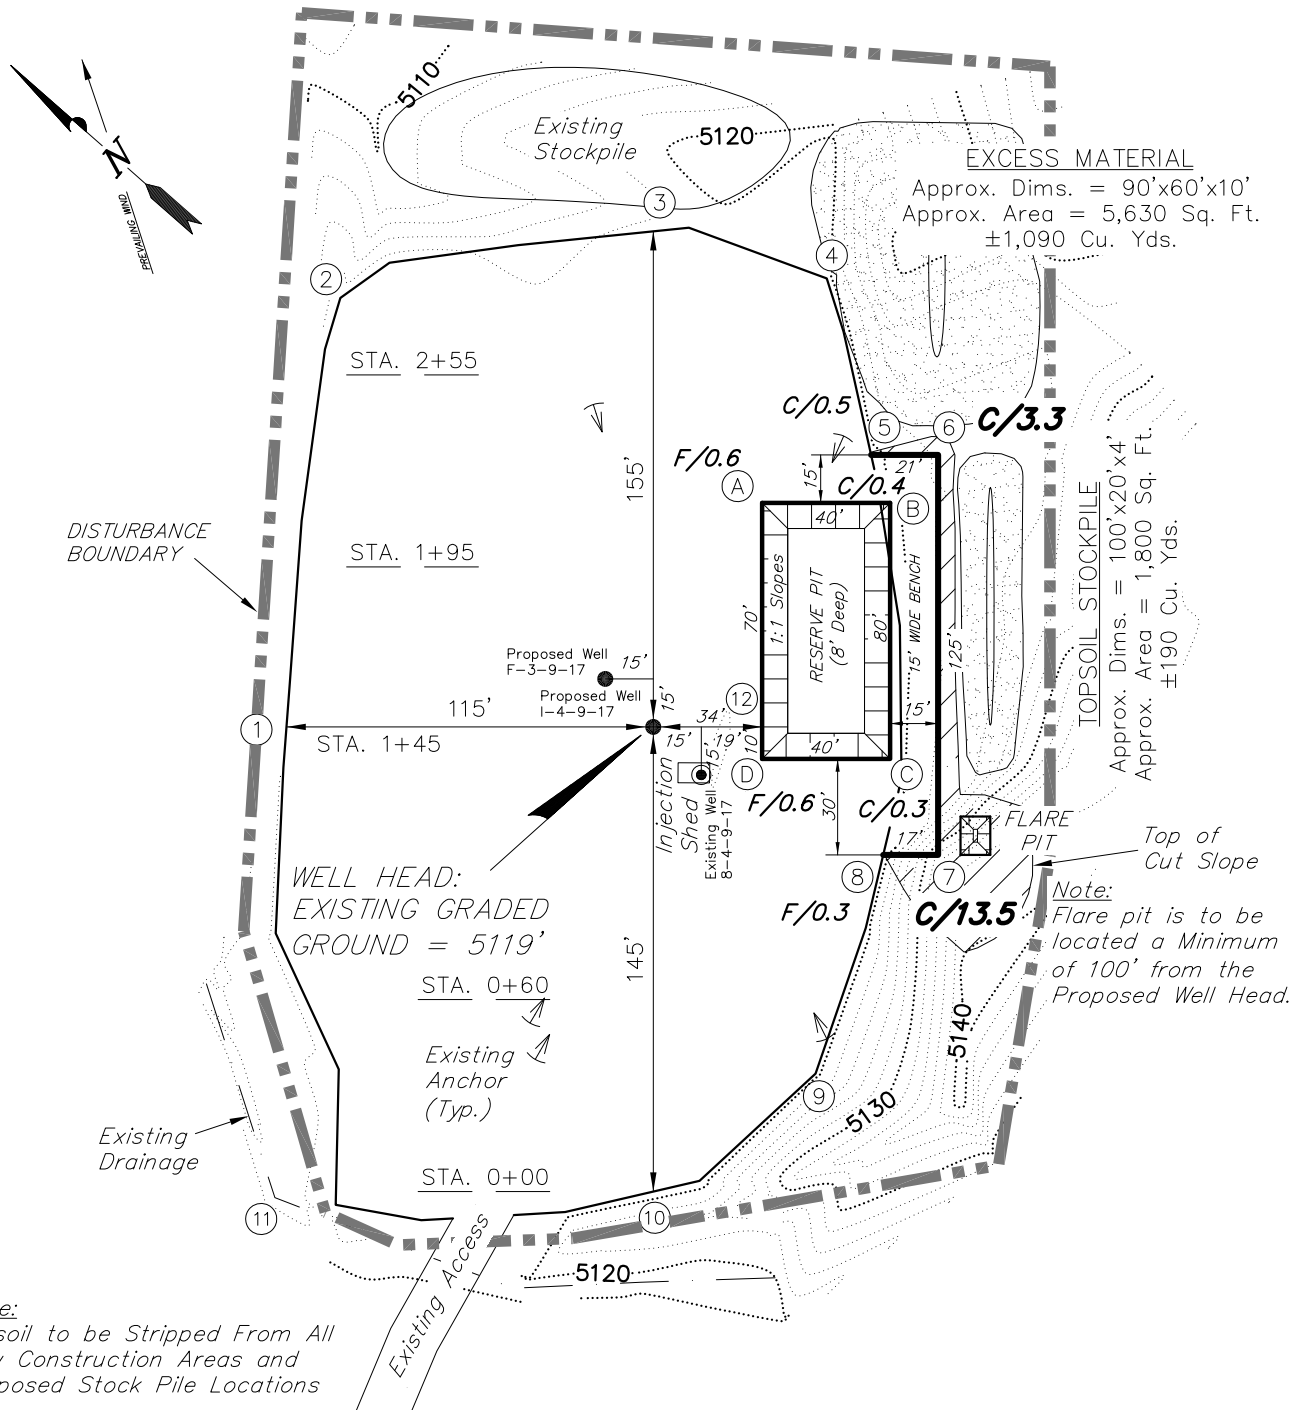NEWFIELD EXPLORATION COMPANY**LOCATION LAYOUT****8-4-9-17 (Existing Well)****I-4-9-17 (Proposed Well)****F-3-9-17 (Proposed Well)***Pad Location: SENE Section 4, T9S, R17E, S.L.B.&M.***Note:**

Topsoil to be Stripped From All New Construction Areas and Proposed Stock Pile Locations




NOTE:

The topsoil & excess material areas are calculated as being mounds containing 1,280 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

SURVEYED BY: C.S.	DATE SURVEYED: 06-29-11	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 08-01-11	V1
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: November 01, 2011

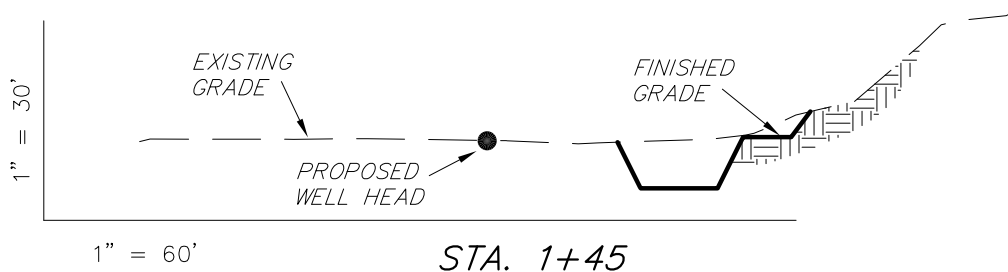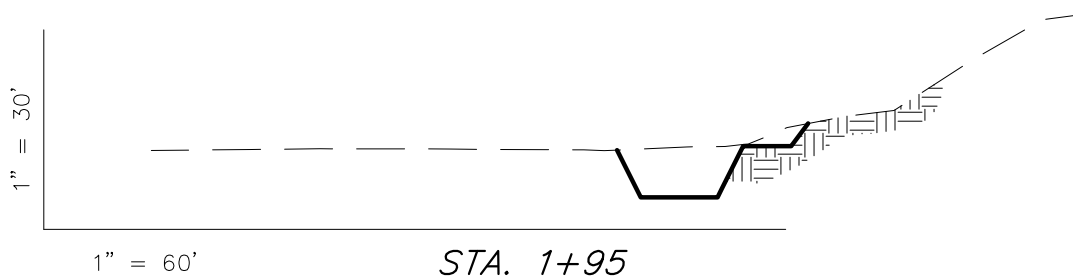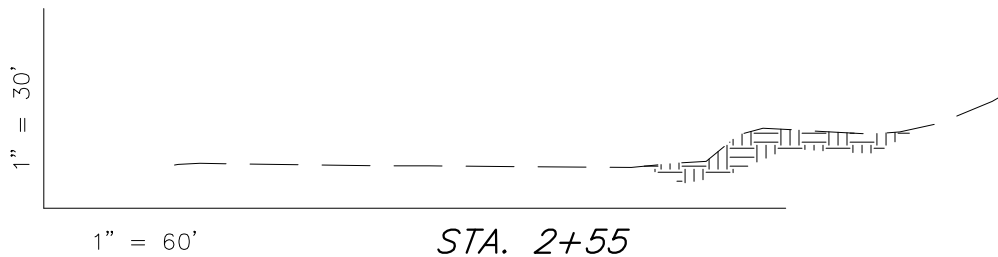NEWFIELD EXPLORATION COMPANY***CROSS SECTIONS******8-4-9-17 (Existing Well)******I-4-9-17 (Proposed Well)******F-3-9-17 (Proposed Well)******Pad Location: SENE Section 4, T9S, R17E, S.L.B.&M.***

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	350	50	Topsoil is not included in Pad Cut	300
PIT	690	0		690
TOTALS	1,040	50	180	990

SURVEYED BY: C.S.	DATE SURVEYED: 06-29-11	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 08-01-11	V1
SCALE: 1" = 60'	REVISED:	

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

RECEIVED: November 01, 2011



VIA ELECTRONIC DELIVERY

November 2, 2011

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
GMBU F-3-9-17
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R17E Section 4: SENE (UTU-75038)
2076' FNL 618' FEL

At Target: T9S-R17E Section 3: NWNW (UTU-61252)
1078' FNL 277' FWL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 11/1/2011, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4153 or by email at pburns@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink, appearing to read "PB", is written over a horizontal line.

Peter Burns
Land Associate

Form 3160-3
(August 2007)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**APPLICATION FOR PERMIT TO DRILL OR REENTER****Bold*** fields are required.


Section 1 - Completed by Operator	
1. BLM Office* Vernal, UT	2. Confidentiality <input type="checkbox"/> Confidential
3. Work Type* <input checked="" type="radio"/> DRILL <input type="radio"/> REENTER	4. Well Type* OIL
Operating Company Information	
5. Company Name* NEWFIELD PRODUCTION COMPANY	
6. Address* ROUTE #3 BOX 3630 MYTON UT 84052	7. Phone Number* 435-646-3721
Administrative Contact Information	
8. Contact Name* MANDIE _ CROZIER	9. Title* REGULATORY ANALYST
10. Address* ROUTE #3 BOX 3630 MYTON UT 84052	11. Phone Number* 435-646-4825
	12. Mobile Number 435-401-8335
13. E-mail* mcrozier@newfield.com	14. Fax Number 435-646-3031
Technical Contact Information	
<input checked="" type="checkbox"/> Check here if Technical Contact is the same as Administrative Contact.	
15. Contact Name* _____	16. Title* _____
17. Address* _____ _____ _____	18. Phone Number* _____ _____
	19. Mobile Number _____
20. E-mail* _____	21. Fax Number _____
Lease and Agreement	
22. Lease Serial Number* _____	

UTU75038			
24. If Unit or CA/Agreement, Name and/or Number GREATER MONUMENT BUTTE		25. Field and Pool, or Exploratory Area* MONUMENT BUTTE	
26. Number of Acres in Lease* 535.31		27. Spacing Unit dedicated to this well 20	
Well			
28. Well Name* GMBU		29. Well Number* F-3-9-17	30. API Number _____
31. Proposed M.D. 6417	32. Proposed T.V.D. 6250	33. Elevation 5119 Ground Level	
34. BLM/BIA Bond Number WYB000493		35. Work Start Date 03/31/2012	36. Work Duration 7 DAYS
37. Number of Completions 1		38. Cable Tool <input type="radio"/> Cable <input checked="" type="radio"/> Rotary	
Surface Location			
39. Specify location using one of the following methods: a) State, County, Section, Township, Range, Meridian, N/S Footage, E/W Footage, with Qtr/Qtr, Lot, or Tract b) State, County, Latitude, Longitude, Metes & Bounds description			
County or Parish, State* DUCHESNE UT			
Section 4	Township 9S	Range 17E	Meridian SALT LAKE BASIN
Qtr/Qtr SENE	Lot # _____	Tract # _____	N/S Footage 2076 FNL
			E/W Footage 618 FEL
Latitude _____	Longitude _____	Metes and Bounds	
40. Distance in miles and direction from nearest town or post office 13.4			
41. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 277'			
42. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1266'			
Bottom Hole Location			
43. Specify location or <input type="checkbox"/> Check here if the bottom hole location is the same as the surface location.			
County or Parish, State* DUCHESNE UT			
Section 3	Township 9S	Range 17E	Meridian SALT LAKE BASIN
Qtr/Qtr	Lot #	Tract #	N/S Footage
			E/W Footage

NWNW	4		1078 FNL	277 FWL
Latitude	Longitude	Metes and Bounds		
44. Additional Information Please provide any additional pertinent information. SURFACE LEASE: UTU-75038 BOTTOM HOLE LEASE: UTU-61252				
I hereby certify that the foregoing is true and correct.				
45. Name* MANDIE _ CROZIER		46. Title REGULATORY ANALYST		
47. Date* (MM/DD/YYYY) 11/01/2011 <input type="button" value="Today"/>		48. Signature* <i>You have the ability to sign this form only if a SmartCard or digital certificate has been issued to you.</i>		
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.				


T9S, R17E, S.L.B.&M.

N89°58'E (G.L.O.)

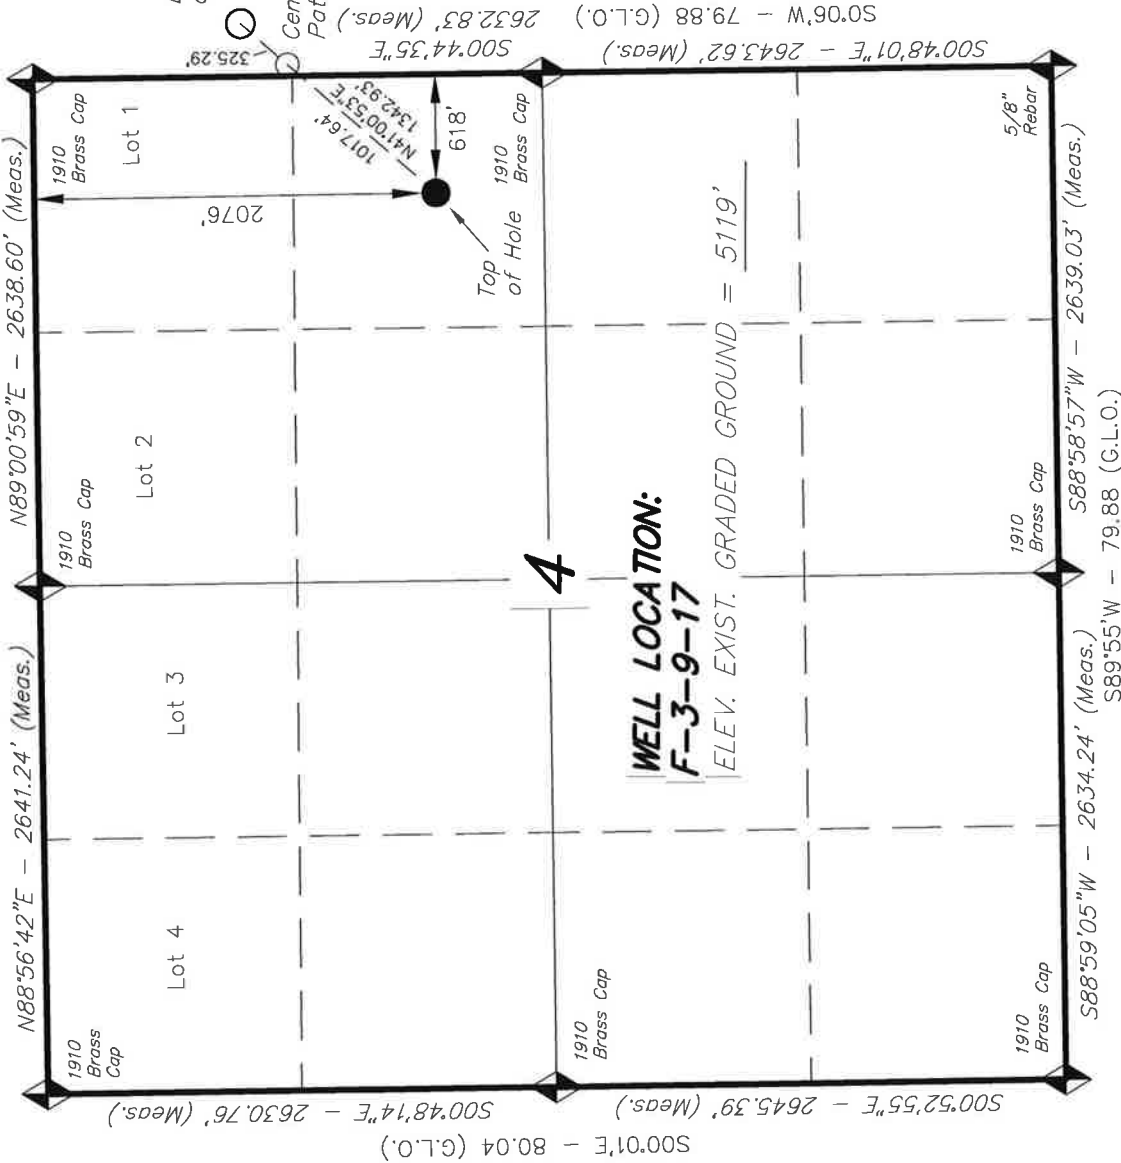

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, F-3-9-17, LOCATED AS SHOWN IN THE SE 1/4 NE 1/4 OF SECTION 4, T9S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.



NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.

WELL LOCATION:
F-3-9-17
ELEV. EXIST. GRADED GROUND = 5119'

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

STACY W. STEWART

08-01-11

REGISTERED LAND SURVEYOR

REGISTRATION NO. 6663

STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 06-29-11	SURVEYED BY: C.S.	VERSION:
DATE DRAWN: 08-01-11	DRAWN BY: M.W.	V1
REVISED:	SCALE: 1" = 1000'	


F-3-9-17
(Surface Location) **NAD 83**
LATITUDE = 40° 03' 41.35"
LONGITUDE = 110° 00' 15.68"

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV.; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

T9S, R17E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

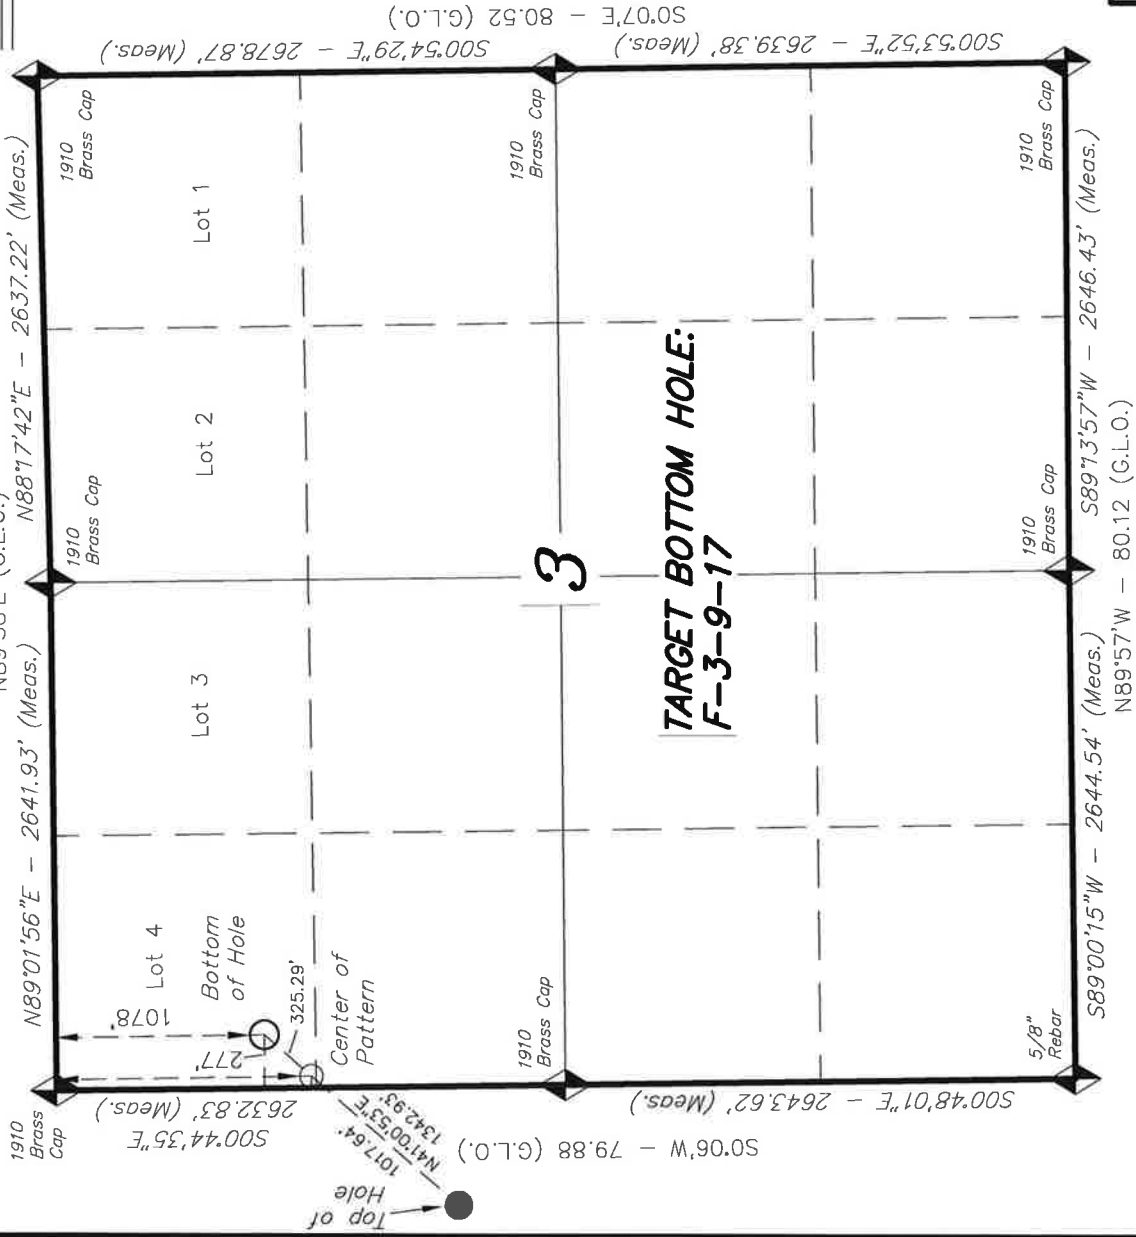

TARGET BOTTOM HOLE, F-3-9-17, LOCATED AS SHOWN IN THE NW 1/4 NW 1/4 (LOT 4) OF SECTION 3, T9S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

NOTES:

- 1. Well footages are measured at right angles to the Section Lines.
- 2. Bearings are based on Global Positioning Satellite observations.
- 3. The Center of Pattern footages are 1320' FNL & 60' FWL.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.


STACY W. STEWART
REGISTERED LAND SURVEYOR
STATE OF UTAH
No. 189377
08-01-11

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV.; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

DATE SURVEYED: 06-29-11	SURVEYED BY: C.S.	VERSION: V1
DATE DRAWN: 08-01-11	DRAWN BY: M.W.	
REVISED:	SCALE: 1" = 1000'	

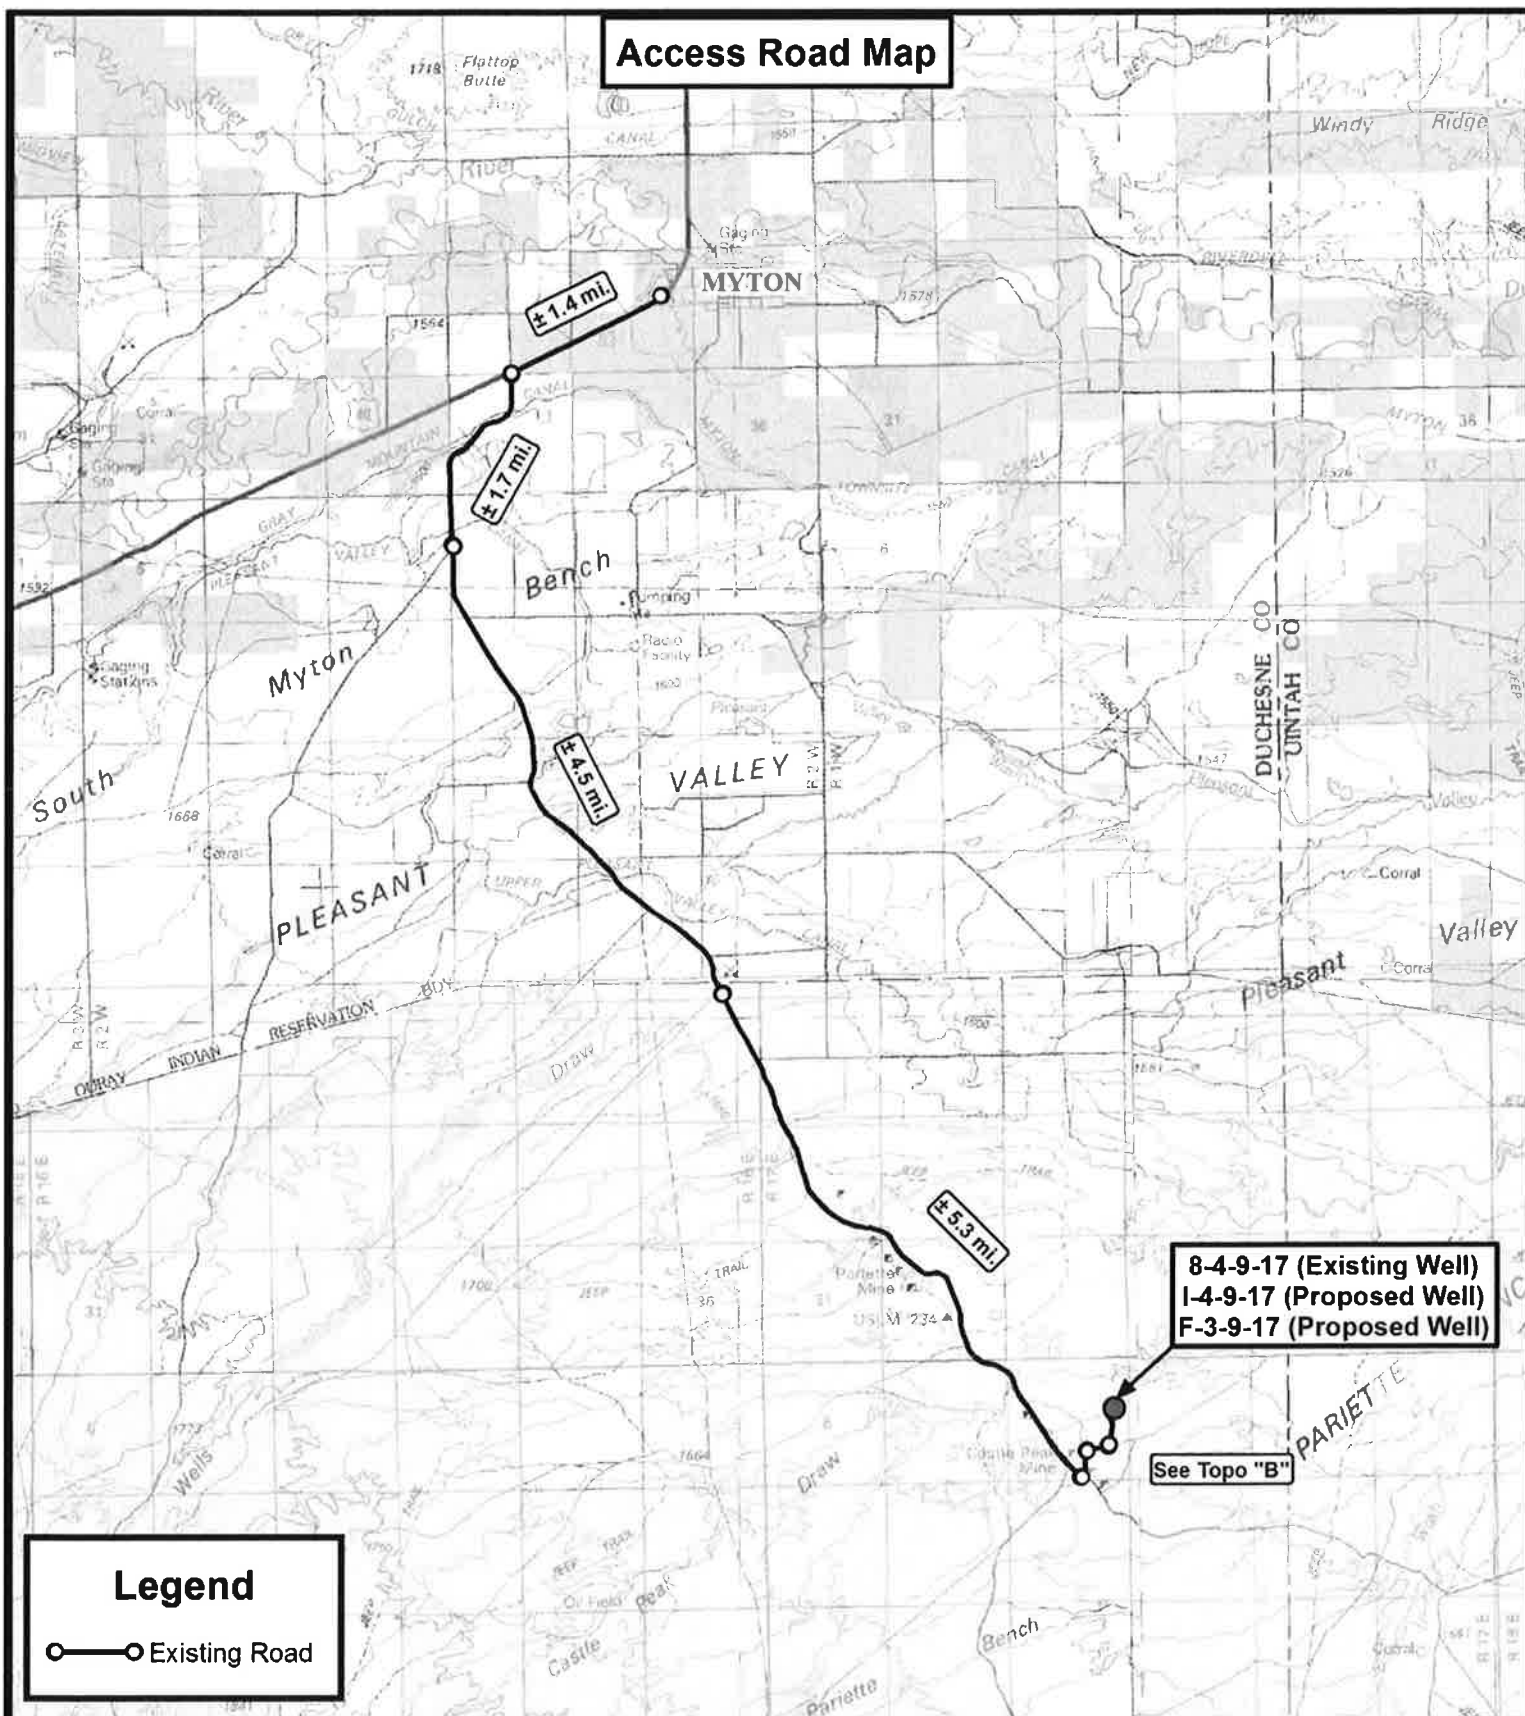

**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

N



NEWFIELD EXPLORATION COMPANY


8-4-9-17 (Existing Well)
 I-4-9-17 (Proposed Well)
 F-3-9-17 (Proposed Well)
 SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.

TOPOGRAPHIC MAP

SHEET

A

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1:100,000		

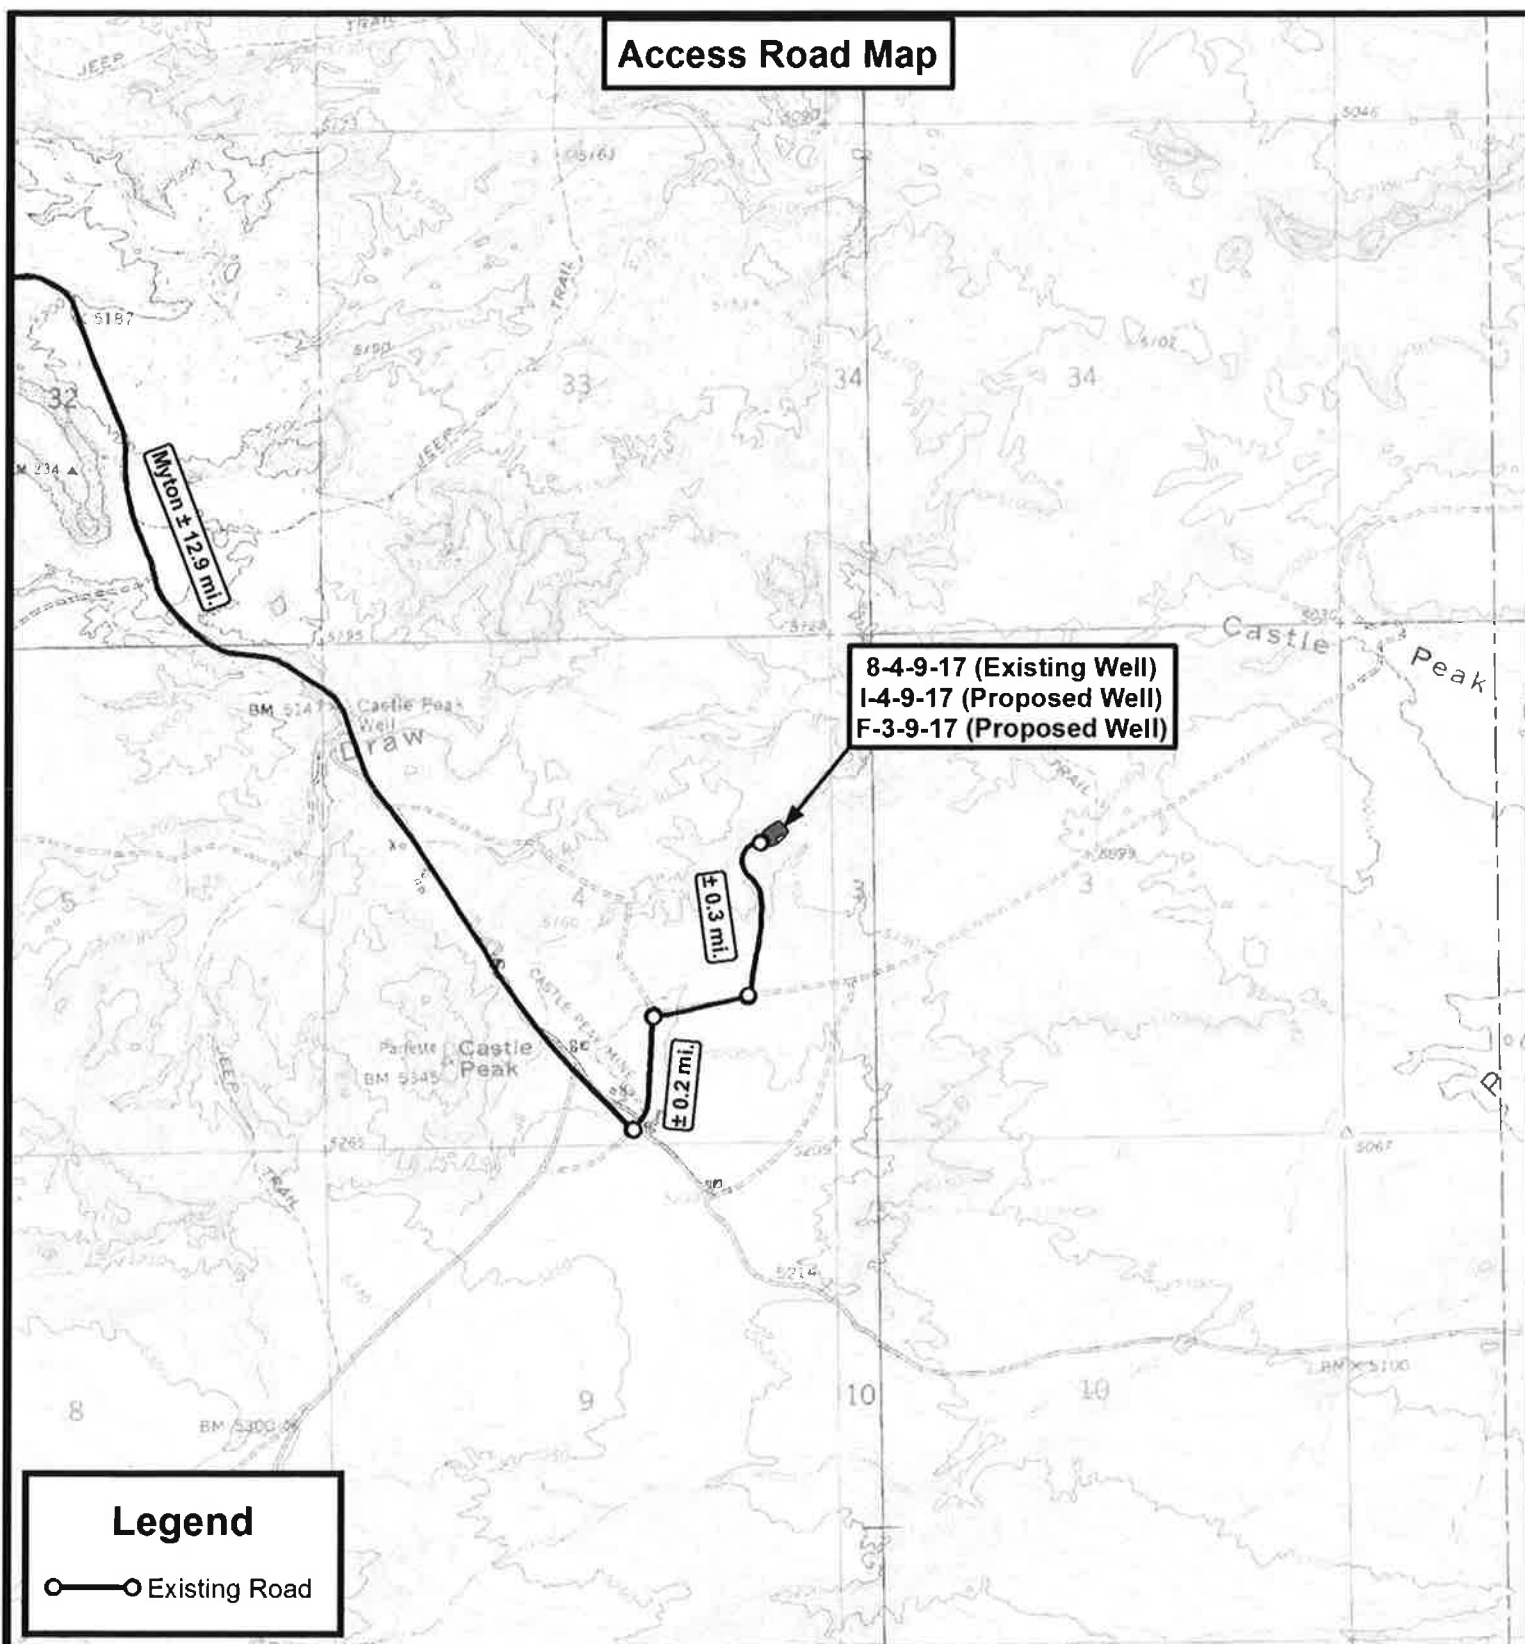

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

8-4-9-17 (Existing Well)

I-4-9-17 (Proposed Well)

F-3-9-17 (Proposed Well)


SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
B

Proposed Pipeline Map

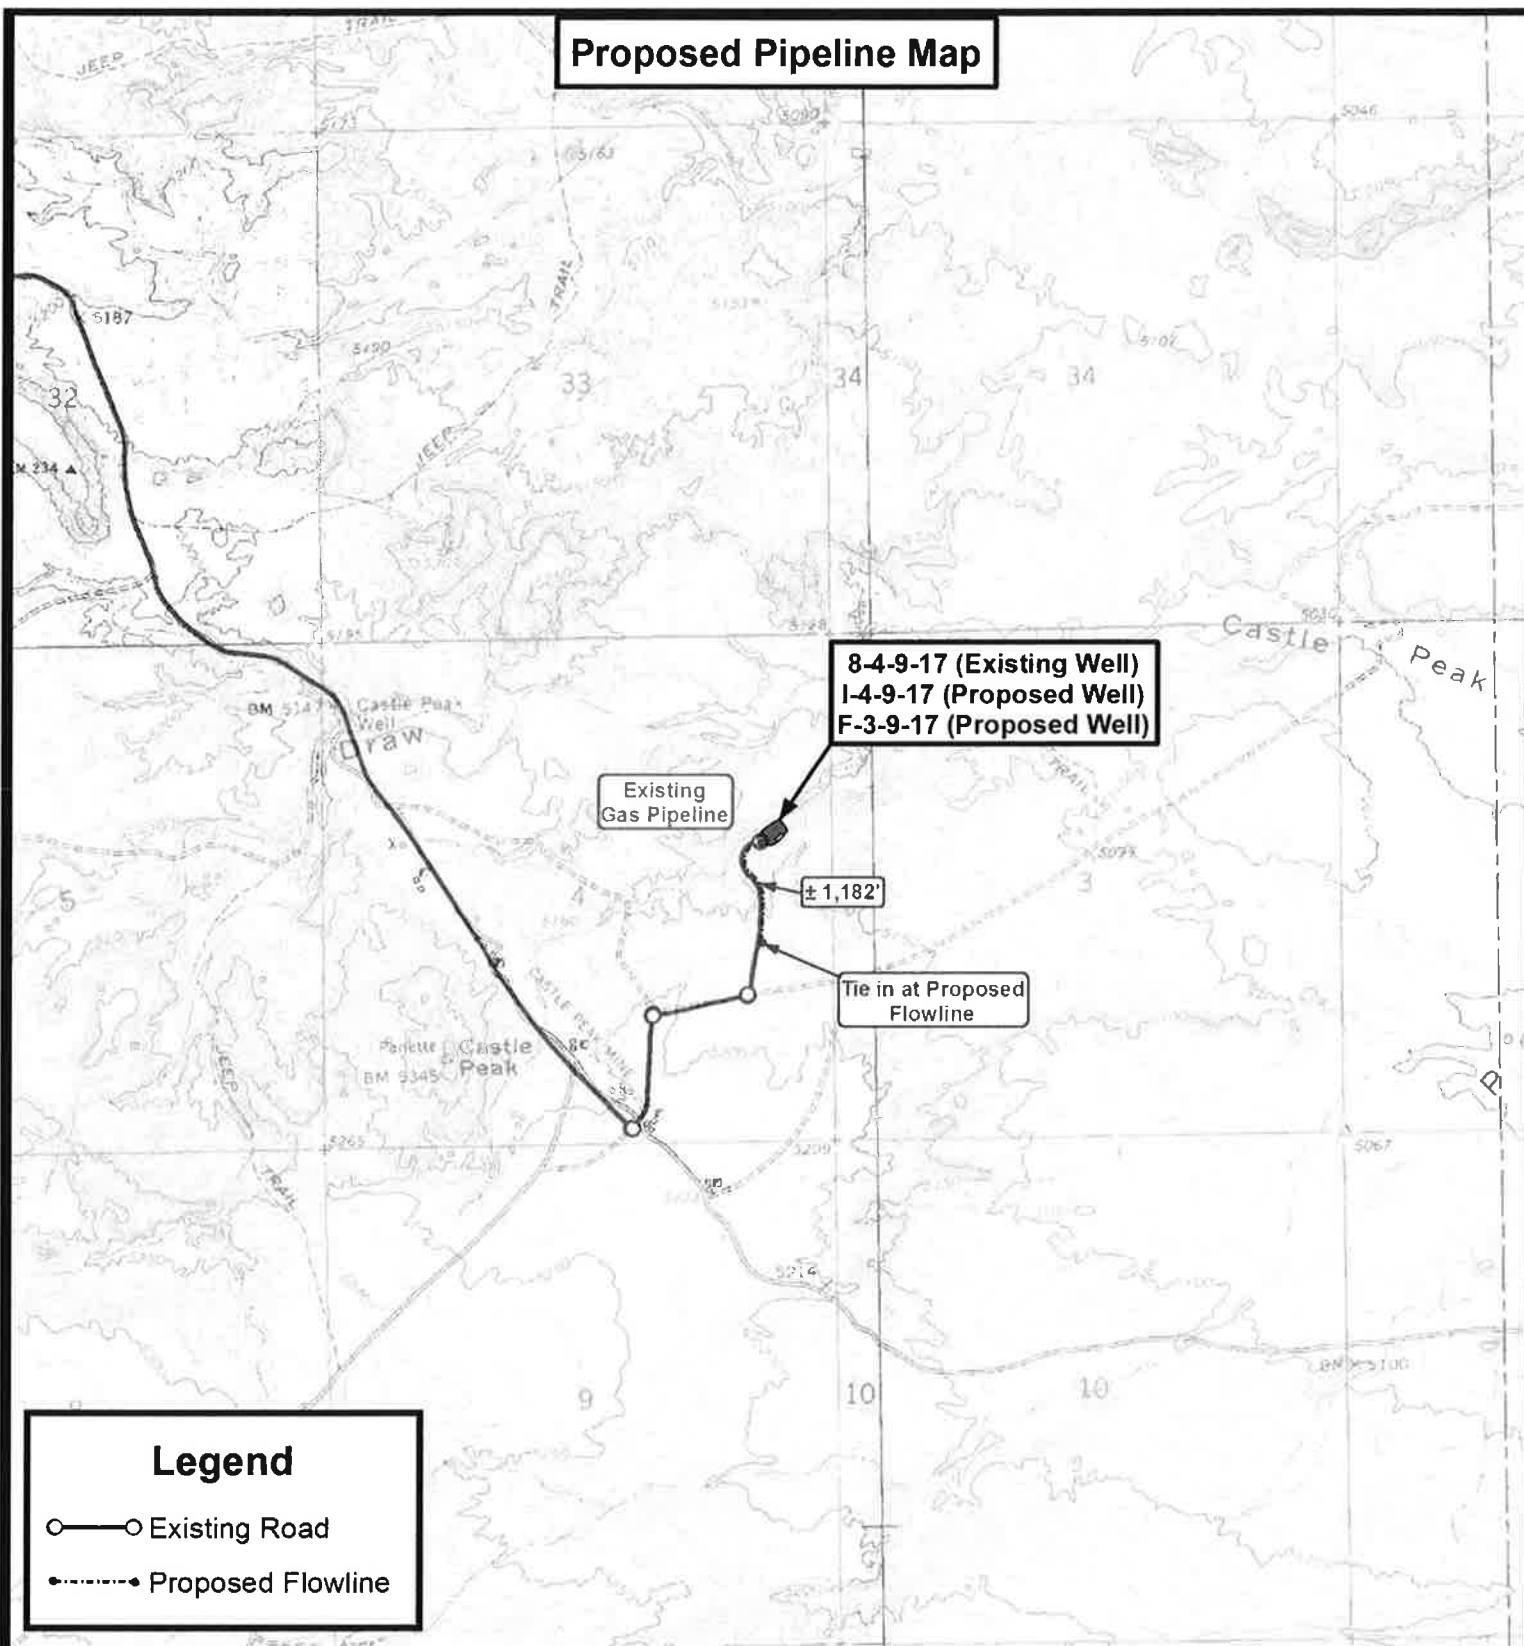

Legend

- Existing Road
- Proposed Flowline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

N



NEWFIELD EXPLORATION COMPANY

8-4-9-17 (Existing Well)

I-4-9-17 (Proposed Well)

F-3-9-17 (Proposed Well)

SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET

C

Exhibit "B" Map

8-4-9-17 (Existing Well)
I-4-9-17 (Proposed Well)
F-3-9-17 (Proposed Well)

Legend

-  1 Mile Radius
-  Pad Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

N



NEWFIELD EXPLORATION COMPANY

8-4-9-17 (Existing Well)
I-4-9-17 (Proposed Well)
F-3-9-17 (Proposed Well)

SEC. 4, T9S, R17E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	07-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
D

API Number: 4301351036

Well Name: GMBU F-3-9-17


Township T0.9 . Range R1.7 . Section 04

Meridian: SLBM



Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:

Map Produced by Diana Mason

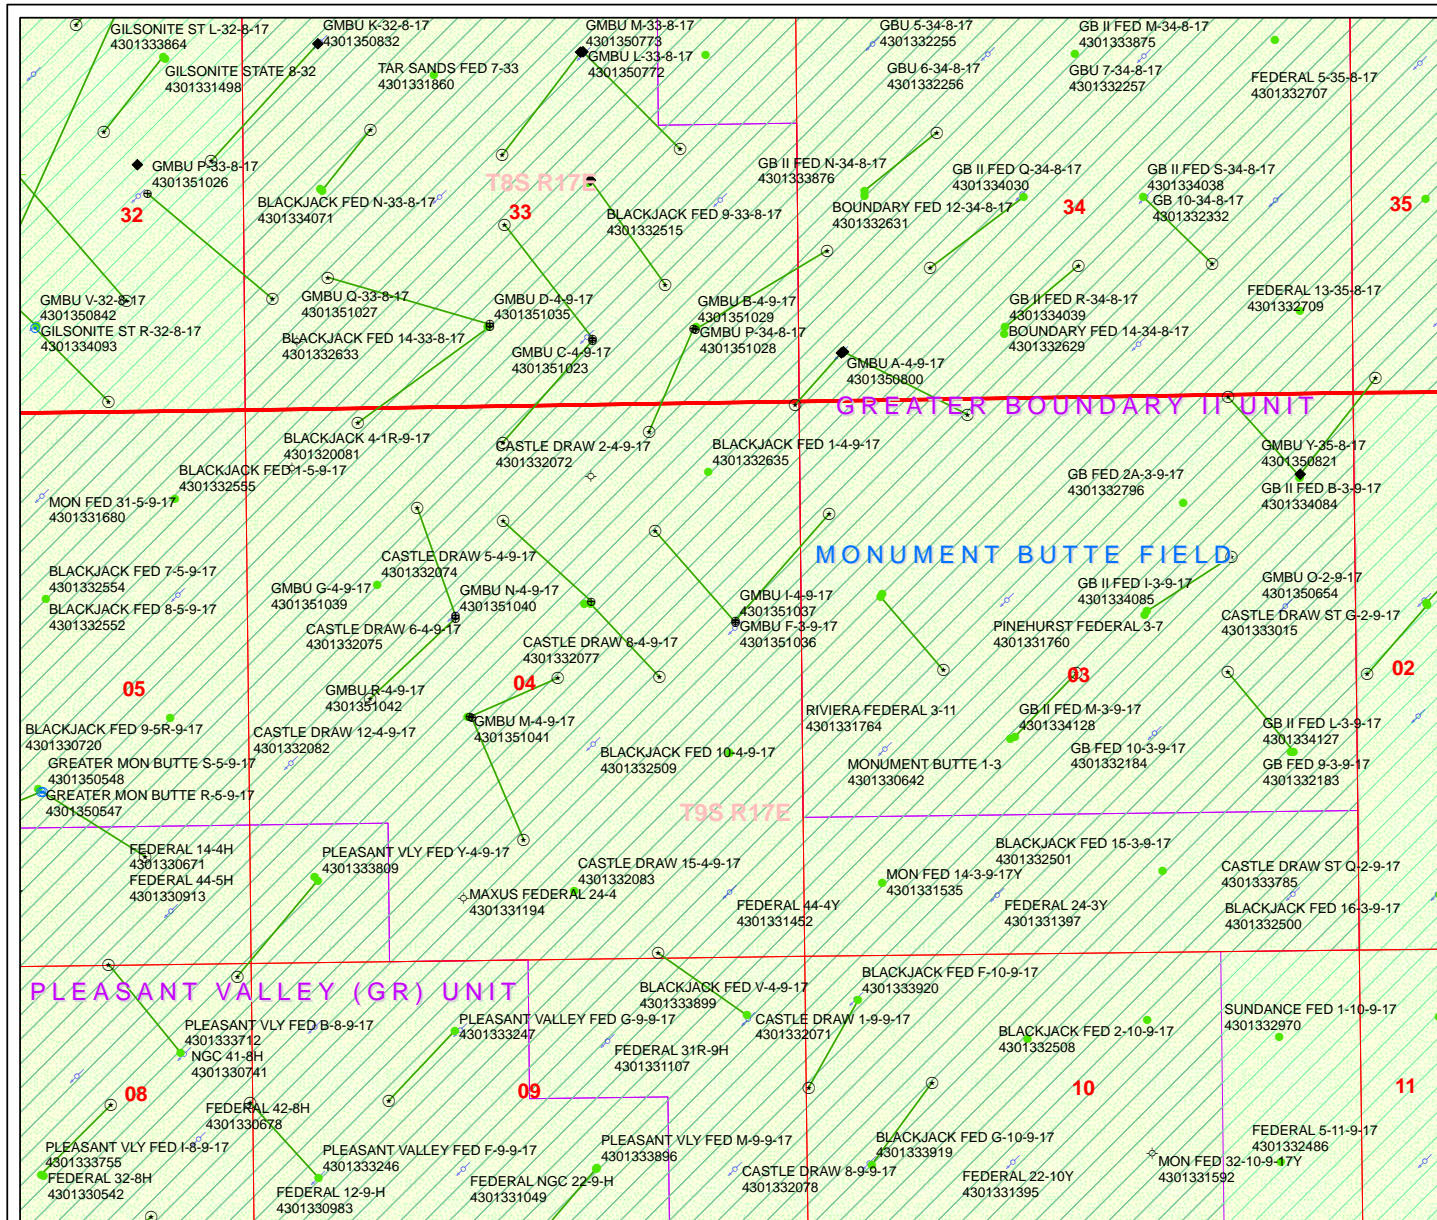

Units	Wells Query
STATUS	STATUS
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NP PP OIL	GS - Gas Storage
NP SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields	SGW - Shut-in Gas Well
STATUS	SOW - Shut-in Oil Well
Unknown	TA - Temp. Abandoned
ABANDONED	TW - Test Well
ACTIVE	WDW - Water Disposal
COMBINED	WW - Water Injection Well
INACTIVE	WSW - Water Supply Well
STORAGE	
TERMINATED	

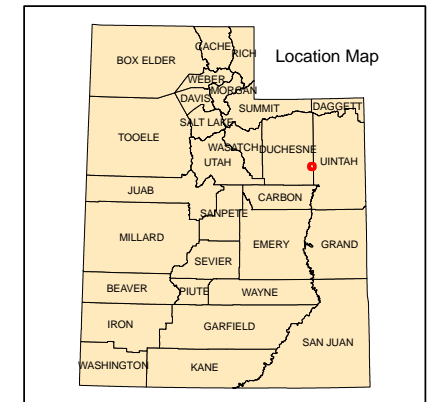

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

November 4, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-51035	GMBU D-4-9-17	Sec 33 T08S R17E 0760 FSL 2329 FWL BHL Sec 04 T09S R17E 0135 FNL 1069 FWL
43-013-51036	GMBU F-3-9-17	Sec 04 T09S R17E 2076 FNL 0618 FEL BHL Sec 03 T09S R17E 1078 FNL 0277 FEL
43-013-51037	GMBU I-4-9-17	Sec 04 T09S R17E 2097 FNL 0619 FEL BHL Sec 04 T09S R17E 1212 FNL 1378 FEL
43-013-51038	GMBU H-4-9-17	Sec 04 T09S R17E 1873 FNL 1991 FEL BHL Sec 04 T09S R17E 1097 FNL 2448 FWL
43-013-51039	GMBU G-4-9-17	Sec 04 T09S R17E 1992 FNL 1990 FWL BHL Sec 04 T09S R17E 0956 FNL 1630 FWL
43-013-51040	GMBU N-4-9-17	Sec 04 T09S R17E 2013 FNL 1991 FWL BHL Sec 04 T09S R17E 2507 FSL 1174 FWL
43-013-51041	GMBU M-4-9-17	Sec 04 T09S R17E 2323 FSL 2119 FWL BHL Sec 04 T09S R17E 2600 FNL 2315 FEL
43-013-51042	GMBU R-4-9-17	Sec 04 T09S R17E 2315 FSL 2138 FWL BHL Sec 04 T09S R17E 1145 FSL 2626 FWL

RECEIVED: November 15, 2011

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,
ou=Branch of Minerals, email=Michael_Coulthard@blm.gov, c=US
Date: 2011.11.04 11:18:54 -06'00'

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:11-4-11

RECEIVED: November 15, 2011

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 11/1/2011**API NO. ASSIGNED:** 43013510360000**WELL NAME:** GMBU F-3-9-17**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)**PHONE NUMBER:** 435 646-4825**CONTACT:** Mandie Crozier**PROPOSED LOCATION:** SENE 04 090S 170E**Permit Tech Review:** ☒**SURFACE:** 2076 FNL 0618 FEL**Engineering Review:** ☐**BOTTOM:** 1078 FNL 0277 FWL**Geology Review:** ☒**COUNTY:** DUCHESNE**LATITUDE:** 40.06150**LONGITUDE:** -110.00434**UTM SURF EASTINGS:** 584913.00**NORTHINGS:** 4435058.00**FIELD NAME:** MONUMENT BUTTE**LEASE TYPE:** 1 - Federal**LEASE NUMBER:** UTU-75038**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER**SURFACE OWNER:** 1 - Federal**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**☒ **PLAT**☒ **Bond:** FEDERAL - WYB000493☐ **Potash**☐ **Oil Shale 190-5**☐ **Oil Shale 190-3**☐ **Oil Shale 190-13**☒ **Water Permit:** 437478☐ **RDCC Review:**☐ **Fee Surface Agreement**☐ **Intent to Commingle****Commingle Approved****LOCATION AND SITING:**☐ **R649-2-3.****Unit:** GMBU (GRRV)☐ **R649-3-2. General**☐ **R649-3-3. Exception**☒ **Drilling Unit****Board Cause No:** Cause 213-11**Effective Date:** 11/30/2009**Siting:** Suspends General Siting☒ **R649-3-11. Directional Drill****Comments:** Presite Completed**Stipulations:** 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhill**RECEIVED: November 21, 2011**



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU F-3-9-17
API Well Number: 43013510360000
Lease Number: UTU-75038
Surface Owner: FEDERAL
Approval Date: 11/21/2011

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED MAY 15 2011

NOV 02 2011

RECEIVED

FORM APPROVED
BLM No. 1004-0136
Approved July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Division of Oil, Gas & Mining UTU75038	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator NEWFIELD EXPLORATION COMPANY Contact: MANDIE CROZIER Email: mcrozier@newfield.com		7. If Unit or CA Agreement, Name and No. UTU87538X	
3a. Address ROUTE 3 BOX 3630 MYTON, UT 84052		8. Lease Name and Well No. GMBU F-3-9-17	
3b. Phone No. (include area code) Ph: 435.646.3721 Ext: 4825 Fx: 435.646.3031		9. API Well No. 43-013-51036	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SENE 2076FNL 618FEL At proposed prod. zone Lot 4 1078FNL 277FWL		10. Field and Pool, or Exploratory UNDESIGNATED MONUMENT BUTTE	
14. Distance in miles and direction from nearest town or post office* 13.4		11. Sec., T., R., M., or Blk. and Survey or Area Sec 4 T9S R17E Mer SLB SME: BLM	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 277'		12. County or Parish DUCHESNE	
16. No. of Acres in Lease 815.00		13. State UT	
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1266'		17. Spacing Unit dedicated to this well 20.00	
19. Proposed Depth 6417 MD 6250 TVD		20. BLM/BIA Bond No. on file WYB000493	
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5119 GL		23. Estimated duration 7 DAYS	
22. Approximate date work will start 03/31/2012			

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)		Name (Printed/Typed) MANDIE CROZIER Ph: 435.646.3721 Ext: 4825		Date 11/01/2011
Title REGULATORY TECH.				
Approved by (Signature) 		Name (Printed/Typed) Jerry Kenczka		Date MAY 08 2012
Title Assistant Field Manager Lands & Mineral Resources		Office VERNAL FIELD OFFICE		

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #121926 verified by the BLM Well Information System
For NEWFIELD EXPLORATION COMPANY, sent to the Vernal
Committed to AFMSS for processing by TYLER LARSEN on 11/04/2011 (12TJL0106AE)

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

UDOGM

115XS1759A

NOS 8/10/11



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: GMBU F-3-9-17
API No: 43-013-51036

Location: SENE, Sec. 4, T9S R17E
Lease No: UTU-75038
Agreement: GMBU

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

SITE SPECIFIC COA's

Wildlife

- The proposed project is within **mountain plover habitat**. If drilling or construction is proposed from May 1 to June 15, then a survey will be conducted by a qualified biologist. Permission to proceed may be granted in accordance with the "USFWS Mountain Plover Survey Guidelines" (March 2002) protocol. It is recommended that reclamation seed mixtures use low growing grasses and forbs.
- The proposed project is within 0.25 mile of a **great-horned owl nest**. If drilling or construction is proposed from February 1 to September 31, then a nest survey will be conducted by a qualified biologist. If it is determined that the nest is inactive, then permission to proceed may be granted by the BLM Authorized Officer. If the nest is determined to be active, then the timing restriction will remain in effect.

Air Quality

- All internal combustion equipment will be kept in good working order.
- Water or other approved dust suppressants will be used at construction sites and along roads, as determined appropriate by the Authorized Officer.
- Open burning of garbage or refuse will not occur at well sites or other facilities.
- Low bleed pneumatics will be installed on separator dump valves and other controllers.
- During completion, flaring will be limited as much as possible. Production equipment and gathering lines will be installed as soon as possible.
- Well site telemetry will be utilized as feasible for production operations.

S.O.P.s

- After cessation of drilling and completion operations, any visible or measurable layer of oil must be removed from the surface of the reserve pit and the pit kept free of oil.

- Pits must be free of oil and other liquid and solid wastes prior to filling. Pit liners must not be breached (cut) or filled (squeezed) while still containing fluids. The pit liner must be removed to the solids level or treated to prevent its reemergence to the surface or its interference with long-term successful revegetation.
- All operator employees and/or authorized personnel (sub-contractors) in the field will have approved applicable APD's, ROW, COAs permits/authorizations on their person(s) during all phases of construction.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM, so that disturbance is returned as close to a natural state as possible..
- Appropriate erosion control and revegetation measures will be employed. In areas with unstable soils where seeding alone may not adequately control erosion, grading will be used to minimize slopes and water bars will be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary, modifications will be made to control erosion.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Production casing cement shall be brought up and into the surface.
- Surface casing cement shall be brought to surface.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to BLM_UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1.

Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-75038
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU F-3-9-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2076 FNL 0618 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 04 Township: 09.0S Range: 17.0E Meridian: S		9. API NUMBER: 43013510360000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/21/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Newfield proposes to extend the Application for Permit to Drill for one year.		
Approved by the Utah Division of Oil, Gas and Mining Date: November 13, 2012 By:		
NAME (PLEASE PRINT) Mandie Crozier		PHONE NUMBER 435 646-4825
SIGNATURE N/A		TITLE Regulatory Tech DATE 11/8/2012



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013510360000

API: 43013510360000

Well Name: GMBU F-3-9-17

Location: 2076 FNL 0618 FEL QTR SENE SEC 04 TWP 090S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 11/21/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mandie Crozier

Date: 11/8/2012

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-75038
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU F-3-9-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2076 FNL 0618 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 04 Township: 09.0S Range: 17.0E Meridian: S		9. API NUMBER: 43013510360000
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE		COUNTY: DUCHESNE
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/21/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: November 18, 2013

By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 11/12/2013	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013510360000

API: 43013510360000

Well Name: GMBU F-3-9-17

Location: 2076 FNL 0618 FEL QTR SENE SEC 04 TWP 090S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 11/21/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mandie Crozier

Date: 11/12/2013

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-75038
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU F-3-9-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2076 FNL 0618 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 04 Township: 09.0S Range: 17.0E Meridian: S		9. API NUMBER: 43013510360000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input checked="" type="checkbox"/> SPUD REPORT Date of Spud: 11/26/2013	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> CHANGE WELL TYPE	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. On 11/26/13 Drill and set 6' of 14" conductor, drill 314' of 12 1/4" hole, set 7 jts 8 5/8" surface casing set depth 328' KB. On 11/26/13 Cement w/ 200 sks G Neat cement, returned 7 bbls to surface		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY December 03, 2013		
NAME (PLEASE PRINT) Cherei Neilson	PHONE NUMBER 435 646-4883	TITLE Drilling Technician
SIGNATURE N/A	DATE 12/3/2013	

NEWFIELD**Casing****Conductor**

Legal Well Name GMBU F-3-9-17				Wellbore Name Original Hole					
API/UWI 43013510360000		Surface Legal Location SENE 2076 FNL 618 FEL Sec 4 T9S R17E Mer SLB		Field Name GMBU CTB8		Well Type Development		Well Configuration Type Slant	
Well RC 500323363		County Duchesne		State/Province Utah		Spud Date 11/23/2013 10:00		Final Rig Release Date	

Wellbore						
Wellbore Name Original Hole				Kick Off Depth (ftKB)		
Section Des		Size (in)	Actual Top Depth (MD) (ftKB)	Actual Bottom Depth (MD) (ftKB)	Start Date	End Date
Conductor		14	13	19	11/23/2013	11/23/2013

Wellhead			
Type	Install Date	Service	Comment

Wellhead Components				
Des	Make	Model	SN	WP Top (psi)

Casing							
Casing Description Conductor		Set Depth (ftKB) 19		Run Date 11/23/2013		Set Tension (kips)	
Centralizers				Scratchers			

Casing Components												
Item Des	OD (in)	ID (in)	Wt (lb/ft)	Grade	Top Thread	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)	Mk-up Tq (ft•lb)	Class	Max OD (in)
Conductor	14	13.500	36.75	H-40		1	6.00	13.0	19.0			

Jewelry Details									
External Casing Packer									
Type	Setting Requirement			Release Requirements			Inflation Method	Vol Inflation (gal)	Equiv Hole Sz (in)
Inflation Fluid Type	Infl Fl Dens (lb/gal)	P AV Set (psi)	AV Acting Pressure (psi)	P ICV Set (psi)	P ICV Act (psi)	ECP Load (1000lbf)	Seal Load (1000lbf)		

Slotted Liner							
% Open Area (%)	Perforation Min Dimension (in)	Perforation Max Dimension (in)	Axial Perf Spacing (ft)	Perf Rows	Blank Top Length (ft)	Blank Bottom Length (ft)	
Slot Description	Slot Pattern			Slot Length (in)	Slot Width (in)	Slot Frequency	Screen Gauge (ga)

Liner Hanger					
Retrievable?	Elastomer Type	Element Center Depth (ft)		Polish Bore Size (in)	Polish Bore Length (ft)
Slip Description				Set Mechanics	
Setting Procedure					
Unsetting Procedure					

NEWFIELD

Casing

Surface

Legal Well Name GMBU F-3-9-17				Wellbore Name Original Hole					
API/UWI 43013510360000		Surface Legal Location SENE 2076 FNL 618 FEL Sec 4 T9S R17E Mer SLB		Field Name GMBU CTB8		Well Type Development		Well Configuration Type Slant	
Well RC 500323363		County Duchesne		State/Province Utah		Spud Date 11/23/2013 10:00		Final Rig Release Date	

Wellbore						
Wellbore Name Original Hole				Kick Off Depth (ftKB)		
Section Des		Size (in)	Actual Top Depth (MD) (ftKB)	Actual Bottom Depth (MD) (ftKB)	Start Date	End Date
Conductor		14	13	19	11/23/2013	11/23/2013
Vertical		12 1/4	19	333	11/23/2013	11/23/2013

Wellhead				
Type	Install Date	Service	Comment	

Wellhead Components				
Des	Make	Model	SN	WP Top (psi)

Casing							
Casing Description Surface		Set Depth (ftKB) 328		Run Date 11/23/2013		Set Tension (kips)	
Centralizers				Scratchers			

Casing Components												
Item Des	OD (in)	ID (in)	Wt (lb/ft)	Grade	Top Thread	Jts	Len (ft)	Top (ftKB)	Btm (ftKB)	Mk-up Tq (ft•lb)	Class	Max OD (in)
Wellhead	8 5/8	8.097	24.00	J-55	ST&C	1	2.10	13.1	15.2			
Cutoff	8 5/8	8.097	24.00	J-55	ST&C	1	43.00	15.2	58.2			
Casing Joints	8 5/8	8.097	24.00	J-55	ST&C	5	223.54	58.2	281.7			
Float Collar	8 5/8	8.097	24.00	J-55	ST&C	1	1.00	281.7	282.7			
Shoe Joint	8 5/8	8.097	24.00	J-55	ST&C	1	43.81	282.7	326.5			
Guide Shoe	8 5/8	8.097	24.00	J-55	ST&C	1	1.50	326.5	328.0			

Jewelry Details										
External Casing Packer										
Type	Setting Requirement			Release Requirements			Inflation Method		Vol Inflation (gal)	Equiv Hole Sz (in)
Inflation Fluid Type	Infl Fl Dens (lb/gal)	P AV Set (psi)	AV Acting Pressure (psi)	P ICV Set (psi)	P ICV Act (psi)	ECP Load (1000lbf)	Seal Load (1000lbf)			

Slotted Liner							
% Open Area (%)	Perforation Min Dimension (in)	Perforation Max Dimension (in)	Axial Perf Spacing (ft)	Perf Rows	Blank Top Length (ft)	Blank Bottom Length (ft)	
Slot Description		Slot Pattern		Slot Length (in)	Slot Width (in)	Slot Frequency	Screen Gauge (ga)

Liner Hanger				
Retrievable?	Elastomer Type	Element Center Depth (ft)	Polish Bore Size (in)	Polish Bore Length (ft)
Slip Description			Set Mechanics	

Setting Procedure				
Unsetting Procedure				

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By
Branden Arnold Phone Number 435-401-0223
Well Name/Number GMBU F-3-9-17
Qtr/Qtr SE/NE Section 4 Township 9S Range 17E
Lease Serial Number UTU-75038
API Number 43-013-51036

Spud Notice – Spud is the initial spudding of the well, not drilling
out below a casing string.

Date/Time 11/23/13 7:00 AM ☐ PM ☐

Casing – Please report time casing run starts, not cementing
times.

- ☐ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 11/23/13 3:00 AM ☐ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

RECEIVED

NOV 21 2013

DIV. OF OIL, GAS & MINING

Date/Time _____ AM ☐ PM ☐

Remarks _____

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Capstar 329
Submitted By JIM LOUDERMILK Phone Number 970-361-3001
Well Name/Number GMBU F-3-9-17
Qtr/Qtr SE/NE Section 4 Township 9S Range 17E
Lease Serial Number UTU75038
API Number 43-013-51036

Rig Move Notice – Move drilling rig to new location.

Date/Time 12/17/2013 12:00 AM ☐ PM ☒

BOPE

- ☒ Initial BOPE test at surface casing point
☐ BOPE test at intermediate casing point
☐ 30 day BOPE test
☐ Other

Date/Time 12/17/2013 8:00 AM ☐ PM ☒

Remarks _____

RECEIVED
DEC 16 2013
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-75038
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU F-3-9-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2076 FNL 0618 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 04 Township: 09.0S Range: 17.0E Meridian: S		9. API NUMBER: 43013510360000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 1/22/2014	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. The above well was placed on production on 01/22/2014 at 15:00 hours.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY February 07, 2014		
NAME (PLEASE PRINT) Jennifer Peatross	PHONE NUMBER 435 646-4885	TITLE Production Technician
SIGNATURE N/A	DATE 2/6/2014	